



PROFESSIONAL ROBOT PIPELINE
PACKAGE MANUFACTURER

专业机器人管线包制造商

江苏威联科机器人技术有限公司
Jiangsu Winlink Robot Technology Co., Ltd

邮箱:winlink@npt123.com

官网:www.winlinks.com.cn

办公:江苏省苏州市花桥镇新生路189号

厂址:安徽省芜湖市鸠江区官陡门路博通H12栋厂房

江苏威联科机器人技术有限公司

Jiangsu Winlink Robot Technology Co., Ltd



目录

机器人管线包方案.....	03-05
拖链管线包系统.....	06-19
机器人拖链管.....	07-08
标准拖链支架.....	09-11
旋转拖链支架.....	12-14
协作拖链支架.....	15-17
拖链管零部件.....	18-19
波纹软管线包系统.....	20-64
机器人波纹软管.....	21-24
工业软管固定支架.....	25-28
旋转集成软管支架.....	30-34
铝制集成软管支架.....	35-39
协作集成固定支架.....	40-47
管线包零部件系列.....	48-61
管线包伸缩盒系列.....	62-64
机器人包线布.....	65-67
工业软管接头.....	68
工业电缆格兰头.....	69



江苏威联科机器人技术有限公司是一家从事机器人管线包研发,生产,销售于一体的现代化科技企业,本公司于2023年由蓝江投资成立,拥有独立研发部门,针对各种类型机器人拥有成熟的解决方案,凭借多年研发实力稳居国内行业品牌之列,并与比亚迪,宁德时代,埃夫特,海康等保持密切合作,深受广大客户一致认可。


公司注重锐意革新,始终坚持创新,诚信,客户至上的原则,为客户提供适合的产品,打造完善的解决方案,公司正以坚实稳健的步伐,朝着规模化,产业化的方向发展。

本公司热忱期望与各界携手一道。共同推动机器人管线包迈向国际,让自动化设备充满 Made in China!我们将持续以技术为服务的根基,以客户需求为服务核心,用专业的服务打造出让客户满意的产品。





江苏威联科机器人技术有限公司
名称: KR210-R2700
型号: WLK-KR210-R2700-1J-6J-DG-48R
类型: 三轴滑动导轨伸缩装置

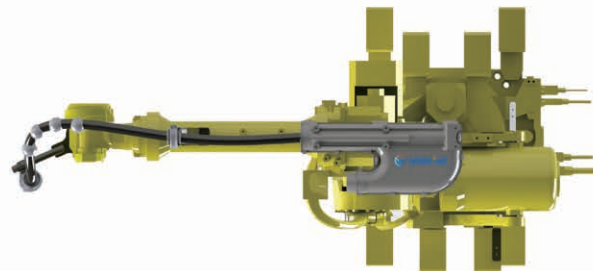

江苏威联科机器人技术有限公司
名称: FANUC-R-2000IC-165F
型号: WLK-R-2000IC-165F-3J-6J-LH-48R
类型: 3-6轴U型盒伸缩装置



江苏威联科机器人技术有限公司
名称：ABB-IRB6700
型号：WLK-ABB-IRB6700-1J-6J-TH-48R
类型：三轴直型伸缩装置



江苏威联科机器人技术有限公司
名称: ABB-IRB6700
型号: WLK-ABB-IRB6700-1J-6J-TG-48
类型: 三轴挑高型



机器人管线包系统



项目号	零件号	说明	单位	数量
1	WLK-RGCPQ-36A (80-85mm)	协作抱箍固定座/小臂	套	2
2	WLK-RGCPQ-36A (113-121mm)	协作抱箍固定座/大臂	套	2
3	WLK-RGWQP-63	六轴网球拍	个	1
4	WLK-RGQFW-36A	前末端固定座	套	1
5	WLK-RGQ-36A	防撞摩擦球	个	2
6	WLK-RG-PUR-36B	机器人波纹管	米	3

江苏威联科机器人技术有限公司

名称: 遨博AUBO-i10

型号: WLK-AUBO-i10-1J-6J-GG-36R

类型: 协作管箍式



机器人管线包系统



项目号	零件号	说明	单位	数量
1	WLK-RGCPQ-36A (85-91mm)	协作抱箍固定座/小臂	套	2
2	WLK-RGCPQ-36A (104-112mm)	协作抱箍固定座/大臂	套	2
3	WLK-RGWQP-63	六轴网球拍	个	1
4	WLK-RGQFW-36A	前末端固定座	套	1
5	WLK-RGQ-36A	防撞摩擦球	个	2
6	WLK-RG-PUR-36B	机器人波纹管	米	3

江苏威联科机器人技术有限公司

名称: 优傲UR10e

型号: WLK-UR10e-1J-6J-GG-36R

类型: 协作管箍式



拖链管线包系统

在工业生产过程中,机器人的应用越来越广泛,复杂的生产环境,不仅需要机器人多维运动确保生产作业的流畅性,更要适应严苛的工作环境。而机器人万向多维拖链管凭借其伸缩,扭转与弯曲相结合的三维特性,使工业机器人在工作中游刃有余。

拖链管线包系统包括:


- ① 机器人拖链管..... (07-08)
- ② 标准拖链支架..... (09-11)
- ③ 旋转拖链支架..... (12-14)
- ④ 协作拖链支架..... (15-17)
- ⑤ 拖链管零部件..... (18-19)

威联科万向拖链可实现万向旋转,扭曲与伸缩,内部采用螺丝固定,抗拉力极强,可跟随机器人运动而转动,另有配球支架,滑动支架,前端支架,伸缩盒等提供配套,实现整体1-6轴管线包定制,满足个性化定制。

机器人侧开拖链管

ROBOT SIDE OPENING DRAG CHAIN TUBE

- 品牌：威联科/Winlink
- 材料：改性尼龙
- 颜色：黑色
- 认证：CE、ROHS
- 性能：耐磨性好，三维万向伸缩，扭转，弯曲
- 应用：工业机器人，协作机器人
- Brand: Winlink
- Material: Modified Nylon
- Color: Black
- Authentication: CE、ROHS
- Performance:Wear resistant, stretchable, twisting, bending
- Applications: Industrial robots, collaborative robots

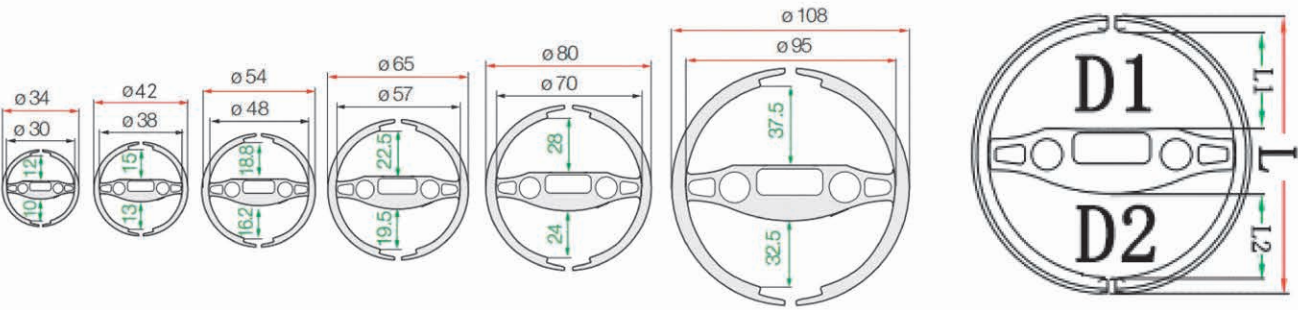


产品选型参数表

威联科产品型号 Product model	内部宽度 inner width		最大电缆直径 Maximum cable diameter		外径 outside	弯曲半径 bending
PN.	L1 mm	L2 mm	D1 mm	D2 mm	L mm	mm
WLK-RGTL-30K	12	10	10	8	34	50
WLK-RGTL-38K	15	13	13	11	42	58
WLK-RGTL-48K	19	16	16	14	54	80
WLK-RGTL-57K	22	19	20	17	65	87
WLK-RGTL-70K	28	24	26	22	80	110
WLK-RGTL-95K	37	32	35	30	108	145

机器人封闭拖链管

ROBOT ENCLOSED DRAG CHAIN TUBE

- 品牌：威联科/Winlink
- 材料：改性尼龙
- 颜色：黑色
- 认证：CE、ROHS
- 性能：耐磨性好，三维万向伸缩，扭转，弯曲
- 应用：工业机器人，协作机器人
- Brand: Winlink
- Material: Modified Nylon
- Color: Black
- Authentication: CE、ROHS
- Performance:Wear resistant, stretchable, twisting, bending
- Applications: Industrial robots, collaborative robots

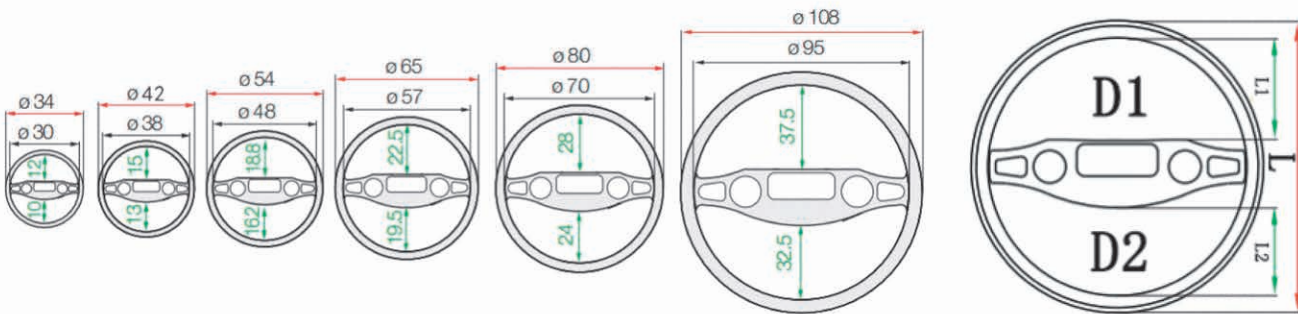

产品选型参数表

威联科产品型号 Product model	内部宽度 inner width		最大电缆直径 Maximum cable diameter		外径 outside	弯曲半径 bending
PN.	L1 mm	L2 mm	D1 mm	D2 mm	L mm	mm
WLK-RGTL-30B	12	10	10	8	34	50
WLK-RGTL-38B	15	13	13	11	42	58
WLK-RGTL-48B	19	16	16	14	54	80
WLK-RGTL-57B	22	19	20	17	65	87
WLK-RGTL-70B	28	24	26	22	80	110
WLK-RGTL-95B	37	32	35	30	108	145

拖链配球固定支架

DRAG CHAIN BALL FIXING BRACKET

- 品牌:威联科/Winlink

■ 材料:改性尼龙

■ 颜色:黑色

■ 认证:CE、ROHS

■ 性能:单扣适配器,可固定任意节距软管及拖链,

■ 可配合机器人360摆动

■ 应用:机器人拖链, 机器人波纹管
- Brand: Winlink

■ Material: Modified Nylon



■ Color: Black

■ Authentication: CE、ROHS

■ Performance: Single buckle adapter, can fix

■ hoses and drag chains of any pitch

■ Application: Robot drag chain, robot hose

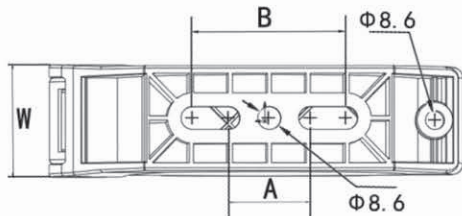

■ 产品选型参数表

威联科产品型号 Product model	适配拖链 drag chain	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	内径 inside	包装 Packing
			长.L	宽.W	高.H			
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGTLR-30A	R30	28×34.2	82	34	72	30~33	32	10
WLK-RGTLR-38A	R38	36×42.3	105	34	93	30~44	37	10
WLK-RGTLR-48A	R48	48×54.0	105	33	93	30~44	48.5	10
WLK-RGTLR-57A	R57	56×67.2	150	38	135	30~56	63	5
WLK-RGTLR-70A	R70	70×80.0	150	38	135	30~56	70	5

拖链导向滑动支架

DRAG CHAIN SLIDING BRACKET

- 品牌:威联科/Winlink

■ 材料:改性尼龙

■ 颜色:黑色

■ 认证:CE、ROHS

■ 性能:双头喇叭口设计,内壁光滑,软管可自

■ 由伸缩滑动

■ 应用:机器人拖链管、机器人波纹管
- Brand: Winlink

■ Material: Modified Nylon

■ Color: Black

■ Authentication: CE、ROHS



■ Performance:Double headed horn mouth design,

■ smooth inner wall, flexible hose can freely

■ expand and slide

■ Applications: Industrial robots, collaborative robots

■ Adaptation: Robot drag chain, robot hose

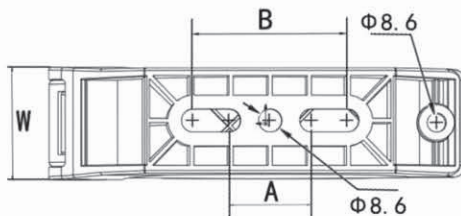


■ 产品选型参数表

威联科产品型号 Product model	适配拖链 drag chain	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	内径 inside	包装 Packing
			长.L	宽.W	高.H			
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGZD-28A	R30	28×34.2	82	34	72	30~33	36	10
WLK-RGZD-36A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGZD-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGZD-56A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGZD-70A	R70	70×80.0	150	38	135	30~56	88	5

拖链前末端固定支架
DRAG CHAIN SIX AXIS BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙
- 颜色:黑色
- 认证:CE、ROHS
- 性能:机器人前端节点对拖链进行固定并出线
- 适配:机器人拖链管、机器人波纹管
- Brand: Winlink
- Material: Modified Nylon
- Color: Black
- Authentication: CE、ROHS
- Performance:The front-end node of the robot
- fixes the drag chain and leads it out
- Adaptation: Robot drag chain, robot hose

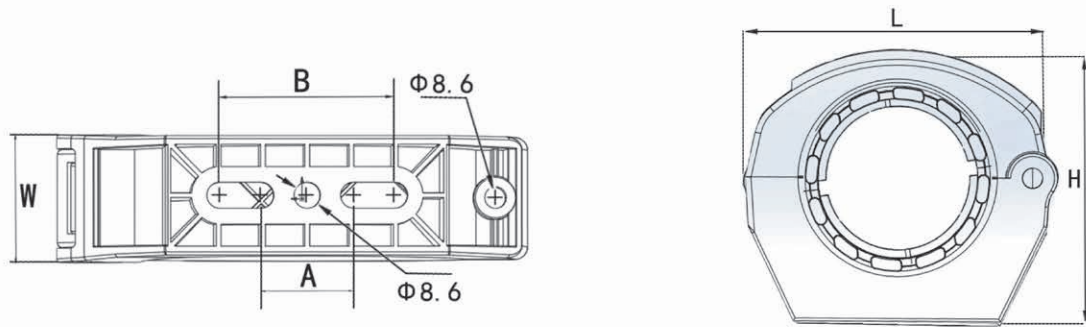


产品选型参数表

威联科产品型号 Product model	适配拖链 drag chain	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	内径 inside	包装 Packing
			长.L	宽.W	高.H			
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGTFW-30A	R30	28×34.2	82	33	72	30~33	32	10
WLK-RGTFW-38A	R38	36×42.3	105	33	93	30~44	37	10
WLK-RGTFW-48A	R48	48×54.0	105	33	93	30~44	48.5	10
WLK-RGTFW-57A	R57	56×67.2	150	38	135	30~56	63	5
WLK-RGTFW-70A	R70	70×80.0	150	38	135	30~56	72	5

拖链旋转配球支架
DRAG CHAIN ROTATING BALL BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙与铝
- 颜色:黑色
- 认证:CE、ROHS
- 性能:以铝万向旋转盘为底座,连接万能配球
- 固定座支架,可以实现跟随机器人万向旋转
- 适配:机器人拖链,机器人波纹管
- Brand: Winlink
- Material: Modified Nylon and Aluminum
- Color: Black
- Authentication: CE、ROHS
- Performance: Equipped with robot hoses and
- drag chains, it can rotate along with the
- robot's movement
- Adaptation: Robot drag chain, robot hose

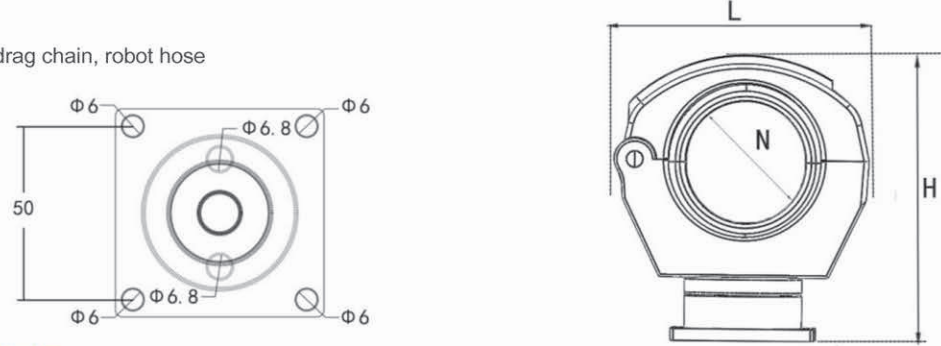



产品选型参数表

威联科产品型号 Product model	适配拖链 drag chain	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	内径 inside	包装 Packing
			长.L	厚.W	高.H			
PN.	AD	AD	长.L	厚.W	高.H	mm	内径.N	PCS
WLK-RGMXQ-23A	/	23×28.2	82	34	99	50	27	10
WLK-RGMXQ-28A	R30	28×34.2	82	34	99	50	32	10
WLK-RGMXQ-36A	R38	36×42.3	105	33	120	50	37	10
WLK-RGMXQ-48A	R48	48×54.0	105	33	120	50	48.5	10
WLK-RGMXQ-56A	R57	56×67.2	150	38	162	50	63	5
WLK-RGMXQ-70A	R70	70×80.0	150	38	162	50	72	5

拖链旋转滑动支架
DRAG CHAIN ROTATING GUIDE BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙与铝
- 颜色:黑色
- 认证:CE、ROHS
- 性能:以铝制万向旋转盘为底座,连接导向固定
- 座支架,内壁光滑,可以实现跟随机器人万向旋转
- 适配:机器人拖链管、机器人波纹管

- Brand: Winlink
- Material: Modified Nylon and Aluminum
- Color: Black
- Authentication: CE、ROHS
- Performance: Equipped with robot hoses and drag chains, the inner wall is smooth and can follow the movement of the robot to expand and rotate
- Adaptation: Robot drag chain, robot hose

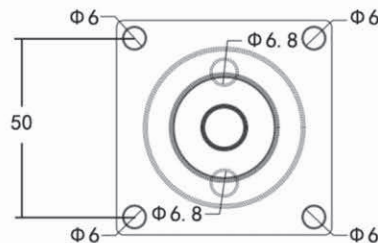



产品选型参数表

威联科产品型号 Product model	适配拖链 drag chain	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	内径 inside	包装 Packing
			长.L	宽.W	高.H			
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGDMX-28A	R30	28×34.2	82	34	72	30~33	36	10
WLK-RGDMX-36A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGDMX-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGDMX-56A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGDMX-70A	R70	70×80.0	150	38	135	30~56	88	5

拖链旋转前末端支架
DRAG CHAIN ROTATING SIX AXIS BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙与铝
- 颜色:黑色
- 认证:CE、ROHS
- 性能:以铝制万向旋转盘为底座,连接带爪前末
- 端固定座支架,可以实现跟随机器人万向旋转
- 适配:机器人拖链管,机器人波纹管

- Brand: Winlink
- Material: Modified Nylon and Aluminum
- Color: Black
- Authentication: CE、ROHS
- Performance: Equipped with robot drag chains and hoses, fixed and divided lines, which can expand and rotate with the movement of the robot
- Adaptation: Robot drag chain, robot hose

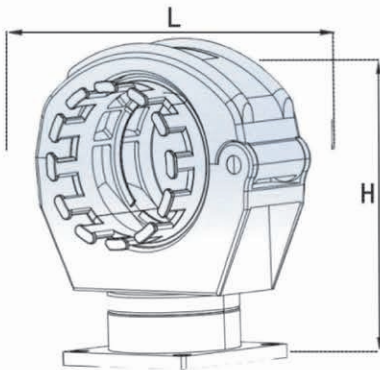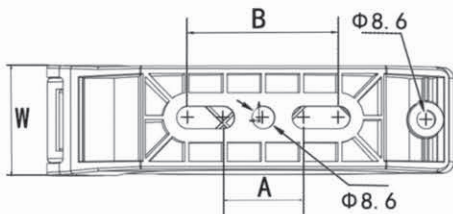


产品选型参数表

威联科产品型号 Product model	适配拖链 drag chain	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	内径 inside	包装 Packing
			长.L	厚.W	高.H			
PN.	AD	AD	长.L	厚.W	高.H	mm	N	PCS
WLK-RGMXF-23A	/	23×28.2	82	34	99	50	27	10
WLK-RGMXF-28A	R30	28×34.2	82	34	99	50	32	10
WLK-RGMXF-36A	R38	36×42.3	105	33	120	50	37	10
WLK-RGMXF-48A	R48	48×54.0	105	33	120	50	48.5	10
WLK-RGMXF-56A	R57	56×67.2	150	38	162	50	63	5
WLK-RGMXF-70A	R70	70×80.0	150	38	162	50	72	5

协作机器人拖链固定支架

COLLABORATIVE ROBOT DRAG CHAIN FIXED BRACKET

- 品牌:威联科/Winlink
 - 材料:改性尼龙与不锈钢
 - 认证:CE、ROHS
 - 性能:抱箍锁紧机械手臂, 支架固定拖链及软管
 - 适配:机器人拖链, 机器人波纹管
- Brand: Winlink
 - Material: Modified Nylon and Stainless Steel
 - Authentication: CE、ROHS
 - Performance: Tighten the mechanical arm with a clamp, fix the drag chain and hose with a bracket
 - Adaptation: Robot drag chain, robot hose

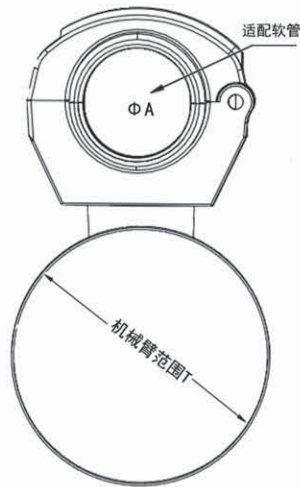


■ 产品选型参数表

威联科产品型号 Product model	适配拖链 drag chain	适配软管 Adapt hose	包装 Packing	可选锁紧范围 Locking range		
PN.	AD	AD	长.L	T mm		
WLK-RGTLQ-23A	/	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGTLQ-28A	R30	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGTLQ-36A	R38	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGTLQ-48A	R48	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGTLQ-56A	R57	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGTLQ-70A	R70	70×80.0	5	162-174mm	其它接受定制	

协作机器人拖链滑动支架

COLLABORATIVE ROBOT DRAG CHAIN SLIDING BRACKET

- 品牌:威联科/Winlink
 - 材料:改性尼龙与不锈钢
 - 认证:CE、ROHS
 - 性能:抱箍锁紧机械手臂, 支架内壁光滑, 软管可自由伸缩滑动。
 - 适配:机器人拖链, 机器人波纹管
- Brand: Winlink
 - Material: Modified Nylon and Stainless Steel
 - Authentication: CE、ROHS
 - Performance: Tighten the mechanical arm with a clamp, the inner wall of the bracket is smooth, and the hose can freely extend and slide.
 - Adaptation: Robot drag chain, robot hose

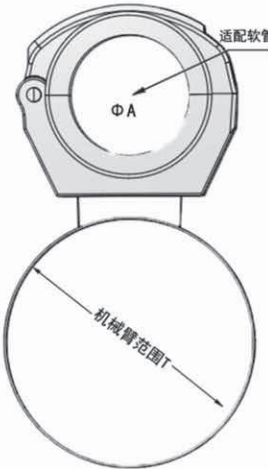

■ 产品选型参数表

威联科产品型号 Product model	适配拖链 drag chain	适配软管 Adapt hose	包装 Packing	可选锁紧范围 Locking range		
PN.	AD	AD	长.L	T mm		
WLK-RGCPD-23A	/	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGCPD-28A	R30	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCPD-36A	R38	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCPD-48A	R48	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGCPD-56A	R57	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCPD-70A	R70	70×80.0	5	162-174mm	其它接受定制	

协作机器人拖链前端支架

COLLABORATIVE ROBOT DRAG CHAIN SIX AXIS BRACKET

- 品牌:威联科/Winlink

■ 材料:改性尼龙与不锈钢

■ 认证:CE、ROHS

■ 性能:机器人前端手臂抱紧,并锁紧软管出线

■ 适配:机器人拖链,机器人波纹管
- Brand: Winlink

■ Material: Modified Nylon , stainless steel

■ Authentication: CE、ROHS

■ Performance:The front arm of the robot is tightly held, locking the hose outlet

■ Adaptation: Robot drag chain, robot hose



产品选型参数表

威联科产品型号 Product model	适配拖链 drag chain	适配软管 Adapt hose	包装 Packing	可选锁紧范围 Locking range		
PN.	φA	φA	长.L	T mm		
WLK-RGTLF-30A	R30	28×34.2	10	56-59mm	60-63mm	64-67mm
WLK-RGTLF-38A	R38	36×42.3	10	68-73mm	74-79mm	80-85mm
WLK-RGTLF-48A	R48	48×54.0	10	86-91mm	92-97mm	98-103mm
WLK-RGTLF-57A	R57	56×67.2	10	104-112mm	113-121mm	122-130mm
WLK-RGTLF-70A	R70	70×80.0	5	131-139mm	140-148mm	149-161mm

拖链摩擦球

DRAG CHAIN FRICTION BALL

- 品牌:威联科/Winlink

■ 材料:改性尼龙

■ 颜色:黑色

■ 认证:CE、ROHS

■ 性能:单扣锁紧设计,可配套支架使用,也可以单独用于摩擦球,通用拖链与软管,具备耐摩擦,可转动,钢性强,耐腐蚀性等特点

■ 适配:机器人拖链管,机器人波纹管
- Brand: Winlink



■ Material: Modified Nylon

■ Color: Black

■ Authentication: CE、ROHS

■ Performance:Install friction balls at key nodes of the drag chain to protect it

■ Adaptation: Robot drag chain, robot hose

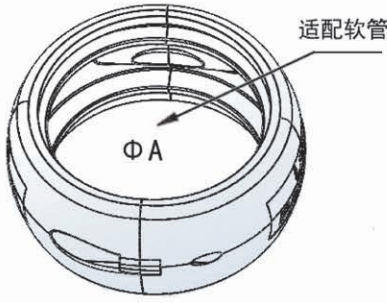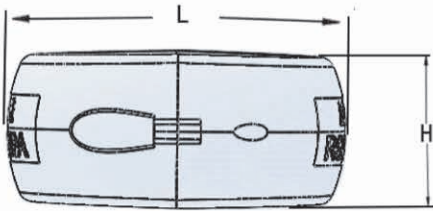

产品选型参数表

威联科产品型号 Product model	适配拖链 drag chain	适配软管 Adapt hose	配件主体尺寸 Bracket size(±1)		内径 inside	包装 Packing
PN.	φA	φA	长.L	高.H	N mm	PCS
WLK-RGT-23A	/	23×28.2	53	35	27	50
WLK-RGT-28A	R30	28×34.2	53	35	32	50
WLK-RGT-36A	R38	36×42.3	70	47	37	20
WLK-RGT-48A	R48	48×54.0	70	36	48.5	20
WLK-RGT-56A	R57	56×67.2	103	47	63	5
WLK-RGT-70A	R70	70×80.0	103	47	72	5

拖链前端球套

DRAG CHAIN FRONT END BALL SLEEVE

- 品牌:威联科/Winlink

■ 材料:改性尼龙

■ 颜色:黑色

■ 认证:CE、ROHS

■ 性能:管线包配件, 配套支架使用于六轴分线

■ 应用:工业机器人, 协作机器人, 自动化设备

■ 适配:机器人拖链管, 机器人波纹管
- Brand: Winlink


■ Material: Modified Nylon

■ Color: Black

■ Authentication: CE、ROHS

■ Performance:Pipeline package accessories, matched with brackets for use in six axis distribution lines

■ Applications: Industrial robots, collaborative robots

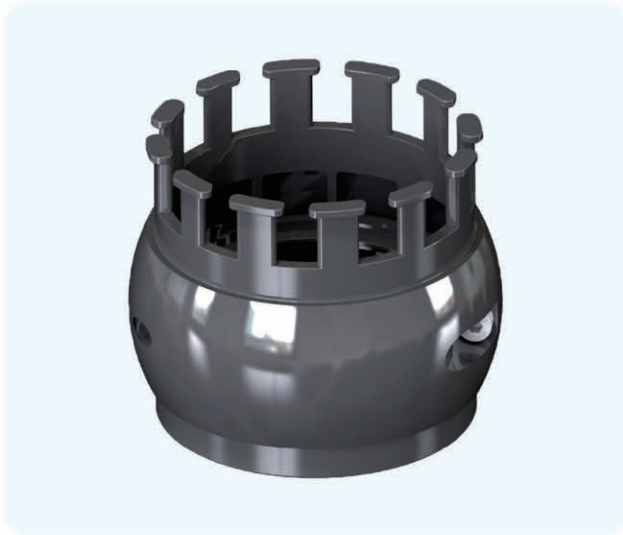

产品选型参数表

威联科产品型号 Product model	适配拖链 drag chain	适配软管 Adapt hose	整袋包装 package
PN.	φA	φA	pcs
WLK-RGF-30A	R30	28×34.2	10
WLK-RGF-38A	R38	36×42.3	10
WLK-RGF-48A	R48	48×54.0	10
WLK-RGF-57A	R57	56×67.2	5
WLK-RGF-70A	R70	70×80.0	5



波纹软管线包系统

随着工业制造2.0时代的到来, 全自动化无人生产车间应运而生, 在未来的生产作业中, 机器人与协作机器人将成为生产车间无可替代的“工人”, 威联科WINLINK为应对即将到来的变革, 不断加大对管线包的研发, 不断推出各型号机器人管线包方案, 可根据用户需求定制, 满足个性化需求。

波纹软管线包系统包括

- ① 机器人波纹管.....

(21-24)
- ② 工业软管固定支架.....

(25-28)
- ③ 旋转集成软管支架.....

(30-34)
- ④ 铝制集成软管支架.....

(35-39)
- ⑤ 协作集成固定支架.....

(40-47)
- ⑥ 管线包零部件系列.....

(48-61)
- ⑦ 管线包伸缩盒系列.....

(62-64)

威联科不断深耕机器人软管及配件的研发, 相继推出标准型软管, 高柔型软管, 细纹型软管, 高波型软管, 耐磨型软管等, 各类固定支架在不同环境下都能稳定有效工作, 确保机器人运行稳定

标准柔性机器人软管

STANDARD FLEXIBLE ROBOT HOSE

- 品牌:威联科/Winlink

■ 材料:聚氨酯 (PUR)

■ 颜色:黑色、蓝色

■ 认证:CE、ROHS

■ 性能:高回弹性,耐折弯,耐摩擦,耐扭曲

■ 应用:工业机器人,协作机器人
- Brand: Winlink


■ Material: PUR

■ Color: Black, Blue

■ Authentication: CE、ROHS

■ Performance: High resilience, resistant to bending, friction, and twisting

■ Applications: Industrial robots, collaborative robots

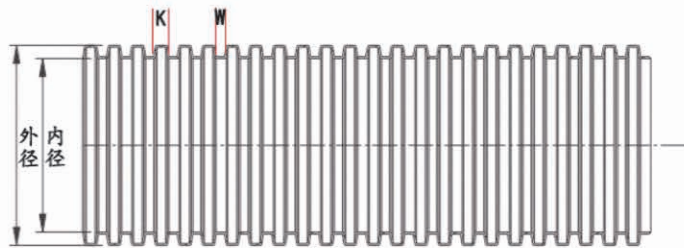

产品选型参数表

威联科产品型号 Product model	内径×外径 ID*OD	节距 pitch	波段K/W 公差±0.2mm		壁厚 thick	弯曲半径 Stat.r	整卷包装 Packing
			K值	W值			
PN.	mm	mm			mm	mm	M/ring
WLK-RG-PUR-17B	17×21.0	3.2	2.2	1	0.6	40	100
WLK-RG-PUR-20B	20×25.0	4.4	3	1.4	0.7	40	50
WLK-RG-PUR-23B	23×28.2	4.4	3	1.4	0.7	45	50
WLK-RG-PUR-28B	28×34.2	6.3	4	2.3	0.8	55	50
WLK-RG-PUR-36B	36×42.3	7	5.2	1.8	0.9	65	30
WLK-RG-PUR-48B	48×54.0	7	5.2	1.8	0.9	80	30
WLK-RG-PUR-56B	56×67.2	7	5	2	1.2	100	30
WLK-RG-PUR-70B	70×80.0	8.5	5.5	3	1.2	120	30
WLK-RG-PUR-95B	95×106	8.5	5.5	3	1.2	150	10

高柔性机器人软管

HIGH FLEXIBILITY ROBOT HOSE

- 品牌:威联科/Winlink

■ 材料:改性聚氨酯 (PUR)

■ 颜色:黑色、蓝色

■ 认证:CE、ROHS

■ 性能:高柔软性,耐折弯,耐摩擦,耐扭曲

■ 应用:工业机器人,协作机器人
- Brand: Winlink


■ Material: Modified polyurethane

■ Color: Black, Blue

■ Authentication: CE、ROHS

■ Performance: High flexibility, resistant to bending, friction, and twisting

■ Applications: Industrial robots, collaborative robots

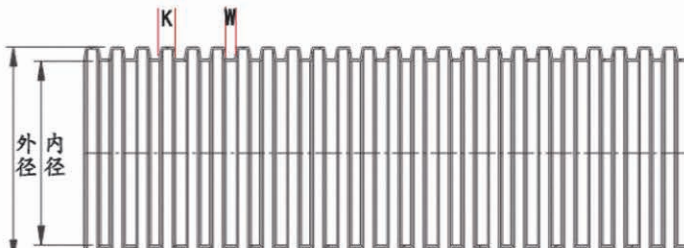

产品选型参数表

威联科产品型号 Product model	内径×外径 ID*OD	节距 pitch	波段K/W 公差±0.2mm		壁厚 thick	弯曲半径 Stat.r	整卷包装 Packing
			K值	W值			
PN.	mm	mm			mm	mm	M/ring
WLK-RG-PUR-17R	17×21.0	3.2	2.2	1	0.6	30	100
WLK-RG-PUR-20R	20×25.0	4.4	3	1.4	0.7	30	50
WLK-RG-PUR-23R	23×28.2	4.4	3	1.4	0.7	35	50
WLK-RG-PUR-28R	28×34.2	6.3	4	2.3	0.8	45	50
WLK-RG-PUR-36R	36×42.3	7	5.2	1.8	0.9	55	30
WLK-RG-PUR-48R	48×54.0	7	5.2	1.8	0.9	70	30
WLK-RG-PUR-56R	56×67.2	7	5	2	1.2	90	30
WLK-RG-PUR-70R	70×80.0	8.5	5.5	3	1.2	100	30
WLK-RG-PUR-95R	95×106	8.5	5.5	3	1.2	120	10

细纹高柔机器人软管

HIGH FLEXIBILITY FINE TOOTH ROBOT HOSE

- 品牌:威联科/Winlink

■ 材料:改性聚氨酯 (PUR)

■ 颜色:黑色、蓝色

■ 认证:CE、ROHS

■ 性能:细节距高柔软性,耐折弯,耐摩擦,耐扭曲

■ 应用:工业机器人,协作机器人
- Brand: Winlink


■ Material: Modified polyurethane

■ Color: Black, Blue

■ Authentication: CE、ROHS

■ Performance: Detail distance high flexibility, resistant to bending, friction, and distortion

■ Applications: Industrial robots, collaborative robots

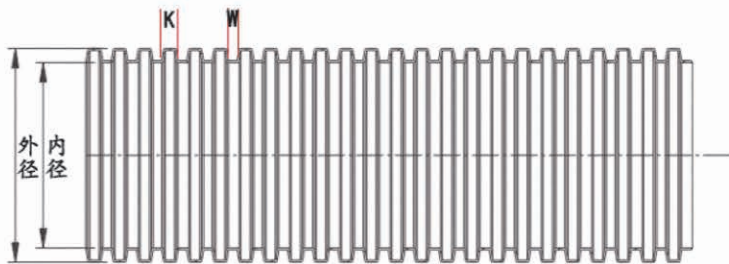

■ 产品选型参数表

威联科产品型号 Product model	内径×外径 ID*OD	节距 pitch	波段K/W 公差±0.2mm		壁厚 thick	弯曲半径 Stat.r	整卷包装 Packing
			K值	W值			
PN.	mm	mm			mm	mm	M/ring
WLK-RG-PUR-23XR	23×28.2	3.3	2.2	1.1	0.7	35	50
WLK-RG-PUR-28XR	28×34.5	4.0	2.5	1.5	0.8	45	50
WLK-RG-PUR-36XR	36×42.3	3.8	2.2	1.6	0.9	50	30
WLK-RG-PUR-48XR	48×54.0	6.0	3.5	2.5	0.9	65	30
WLK-RG-PUR-70XR	70×80.0	6.5	3.3	3.2	1.2	95	30

PA12耐摩机器人软管

PA12 FRICTION RESISTANT ROBOT HOSE

- 品牌:威联科/Winlink

■ 材料:改性尼龙12

■ 颜色:黑色、蓝色

■ 认证:CE、ROHS

■ 性能:高耐摩擦,硬度高,耐冲击,耐扭曲

■ 应用:工业机器人,协作机器人
- Brand: Winlink


■ Material: Modified Nylon 12

■ Color: Black, Blue

■ Authentication: CE、ROHS

■ Performance: High hardness, resistant to friction, impact, and distortion

■ Applications: Industrial robots, collaborative robots


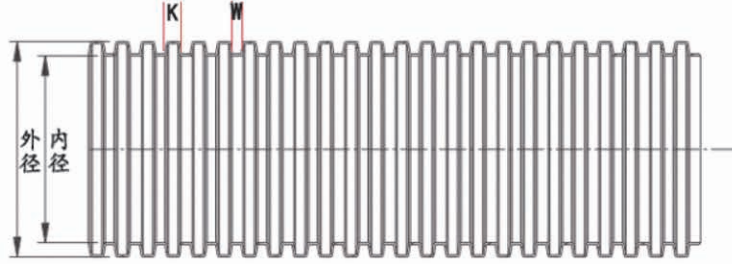


■ 产品选型参数表

威联科产品型号 Product model	内径×外径 ID*OD	节距 pitch	波段K/W 公差±0.2mm		壁厚 thick	弯曲半径 Stat.r	整卷包装 Packing
			K值	W值			
PN.	mm	mm			mm	mm	M/ring
WLK-PA12-17B	17×21.0	3.2	2.2	1	0.6	50	100
WLK-PA12-20B	20×25.0	4.4	3	1.4	0.7	50	50
WLK-PA12-23B	23×28.2	4.4	3	1.4	0.7	55	50
WLK-PA12-28B	28×34.2	6.3	4	2.3	0.8	65	50
WLK-PA12-36B	36×42.3	7	5.2	1.8	0.9	75	30
WLK-PA12-48B	48×54.0	7	5.2	1.8	0.9	90	30
WLK-PA12-56B	56×67.2	7	5	2	1.2	110	30
WLK-PA12-70B	70×80.0	8.5	5.5	3	1.2	130	30
WLK-PA12-95B	95×106	8.5	5.5	3	1.2	160	10

软管配球固定支架
HOSE BALL FIXING BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙
- 颜色:黑色
- 认证:CE、ROHS
- 性能:多扣适配器固定软管,可配合机器人360摆动
- 应用:机器人波纹管
- Brand: Winlink
- Material: Modified Nylon
- Color: Black
- Authentication: CE、ROHS
- Performance: Multi tooth adapter fixed hose,can cooperate with robot 360 swing
- Application: Robot hose

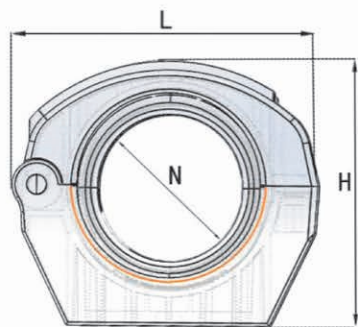
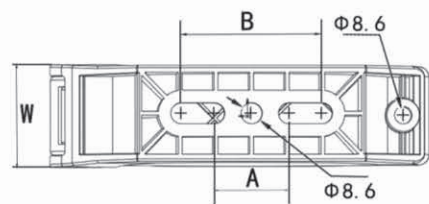


产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	内径 inside	包装 Packing
PN.	AD	长.L	宽.W	高.H	A~B mm	N mm	PCS
WLK-RGHQ-23A	23×28.2	82	34	72	30~33	27	10
WLK-RGHQ-28A	28×34.2	82	34	72	30~33	32	10
WLK-RGHQ-36A	36×42.3	105	33	93	30~44	37	10
WLK-RGHQ-48A	48×54.0	105	33	93	30~44	48.5	10
WLK-RGHQ-56A	56×67.2	150	38	135	30~56	63	5
WLK-RGHQ-70A	70×80.0	150	38	135	30~56	72	5
WLK-RGHQ-95A	95×106	188	49	170	52/89	97	5

软管定位固定支架
HOSE POSITIONING FIXING BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙
- 颜色:黑色
- 认证:CE、ROHS
- 性能:固定软管方向与位置,耐摩擦,抗拉性强
- 应用:机器人波纹管
- Brand: Winlink
- Material: Modified Nylon
- Color: Black
- Authentication: CE、ROHS
- Performance:Fixed hose direction and position, friction resistant, strong tensile strength
- Application: Robot hose

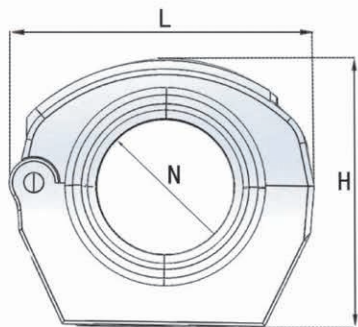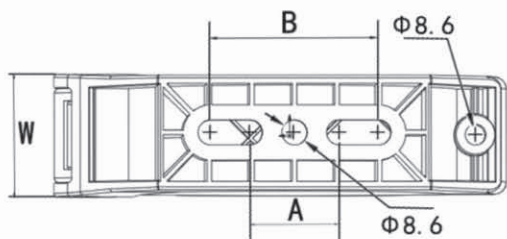

产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	内径 inside	包装 Packing
PN.	AD	长.L	宽.W	高.H	A~B mm	N mm	PCS
WLK-RGQDW-23A	23×28.2	82	34	72	30~33	27	10
WLK-RGQDW-28A	28×34.2	82	34	72	30~33	32	10
WLK-RGQDW-36A	36×42.3	105	33	93	30~44	37	10
WLK-RGQDW-48A	48×54.0	105	33	93	30~44	48.5	10
WLK-RGQDW-56A	56×67.2	150	38	135	30~56	63	5
WLK-RGQDW-70A	70×80.0	150	38	135	30~56	72	5

软管导向滑动支架

HOSE GUIDED SLIDING BRACKET

- 品牌:威联科/Winlink

■ 材料:改性尼龙

■ 颜色:黑色

■ 认证:CE、ROHS

■ 性能:双头喇叭口设计,内壁光滑,软管可自由伸缩滑动

■ 应用:机器人拖链管、机器人波纹管
- Brand: Winlink

■ Material: Modified Nylon



■ Color: Black

■ Authentication: CE、ROHS

■ Performance:Double headed horn mouth design, smooth inner wall, flexible hose can freely expand and slide

■ Applications: Industrial robots, collaborative robots

■ Adaptation: Robot drag chain, robot hose

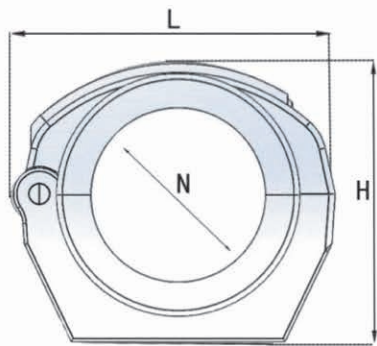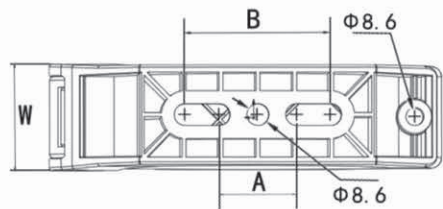

■ 产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)				底座孔距 size(±0.5)	内径 inside	包装 Packing
		AD	长.L	宽.W	高.H			
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	N mm	PCS
WLK-RGZD-28A	R30	28×34.2	82	34	72	30~33	36	10
WLK-RGZD-36A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGZD-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGZD-56A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGZD-70A	R70	70×80.0	150	38	135	30~56	88	5

软管前末端套筒支架

HOSE FRONT END SLEEVE BRACKET

- 品牌:威联科/Winlink

■ 材料:改性尼龙

■ 颜色:黑色

■ 认证:CE、ROHS

■ 性能:喇叭口端接软管,分线器端出线,用于机器人前末端,耐磨擦,抗拉力强

■ 应用:机器人波纹管
- Brand: Winlink



■ Material: Modified Nylon

■ Color: Black

■ Authentication: CE、ROHS

■ Performance:The horn end is connected to a hose, and the splitter end is used for the front end of the robot.

■ Adaptation: robot hose

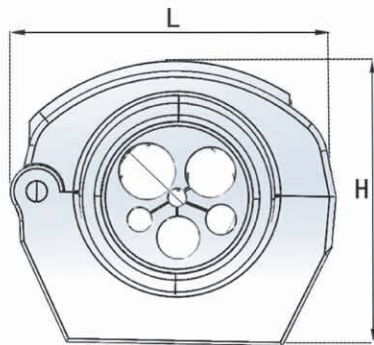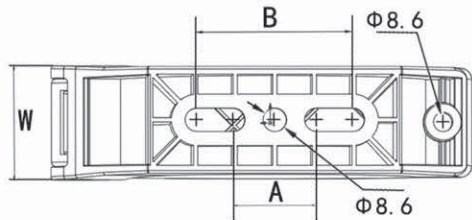


■ 产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)				底座孔距 size(±0.5)	包装 Packing
		长.L	厚.W	高.H	孔数N		
PN.	AD	长.L	厚.W	高.H	孔数N	A~B mm	PCS
WLK-RGQFW-23A	23×28.2	82	34	72	定制	30~33	10
WLK-RGQFW-28A	28×34.2	82	34	72	定制	30~33	10
WLK-RGQFW-36A	36×42.3	105	33	93	6孔	30~44	10
WLK-RGQFW-48A	48×54.0	105	33	93	6孔	30~44	10
WLK-RGQFW-56A	56×67.2	150	38	135	13孔	30~56	5
WLK-RGQFW-70A	70×80.0	150	38	135	13孔	30~56	5

软管前末端配球支架
HOSE FRONT END BALL BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙
- 颜色:黑色
- 认证:CE、ROHS
- 性能:用于机器人前端, 配合固定软管并出线
- 应用:机器人波纹管
- Brand: Winlink
- Material: Modified Nylon
- Color: Black
- Authentication: CE、ROHS
- Performance:Used for robot front-end, in conjunction with fixed hoses and outgoing lines
- Adaptation: robot hose

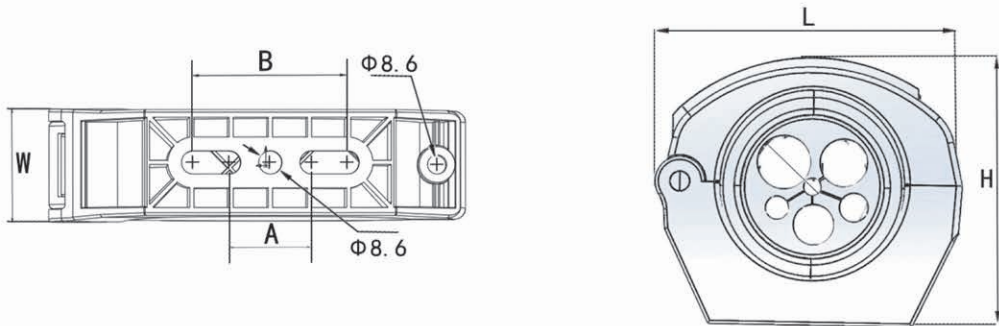


■ 产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)				底座孔距 size(±0.5)	包装 Packing
PN.	AD	长.L	厚.W	高.H	孔数N	A~B mm	PCS
WLK-RGQFX-36A	36×42.3	105	33	93	6孔	30~44	10
WLK-RGQFX-48A	48×54.0	105	33	93	7孔	30~44	10
WLK-RGQFX-56A	56×67.2	150	38	135	10孔	30~56	5
WLK-RGQFX-70A	70×80.0	150	38	135	10孔	30~56	5

旋转配球固定支架
ROTATING BALL HOSE BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙与铝
- 颜色:黑色
- 认证:CE、ROHS
- 性能:以铝万向旋转盘为底座, 连接配球固定座
- 支架, 可以实现跟随机器人万向旋转
- 适配:机器人波纹管
- Brand: Winlink
- Material: Modified Nylon and Aluminum
- Color: Black
- Authentication: CE、ROHS
- Performance:Using an aluminum universal rotating disc as the base and connecting it to a ball mounting bracket, it can achieve universal rotation following the robot
- Adaptation: robot hose

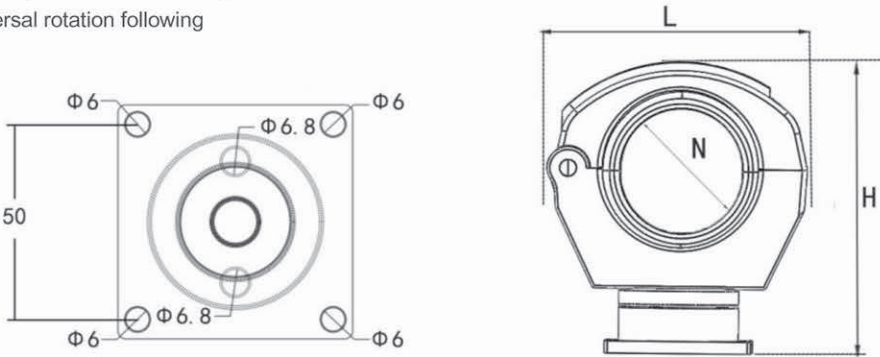



■ 产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	底座孔距 size(±0.5)	包装 Packing
PN.	AD	长.L	厚.W	高.H	mm	内径.N	PCS
WLK-RGQMX-23A	23×28.2	82	34	99	50	27	10
WLK-RGQMX-28A	28×34.2	82	34	99	50	32	10
WLK-RGQMX-36A	36×42.3	105	33	120	50	37	10
WLK-RGQMX-48A	48×54.0	105	33	120	50	48.5	10
WLK-RGQMX-56A	56×67.2	150	38	162	50	63	5
WLK-RGQMX-70A	70×80.0	150	38	162	50	72	5

旋转滑动导向支架

ROTATING SLIDING HOSE BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙与铝
- 颜色:黑色
- 认证:CE、ROHS
- 性能:以铝制万向旋转盘为底座,连接导向固定
- 座支架,内壁光滑,可以实现跟随机器人万向旋转
- 适配:机器人拖链管、机器人波纹管
- Brand: Winlink
- Material: Modified Nylon and Aluminum
- Color: Black
- Authentication: CE、ROHS
- Performance: Equipped with robot hoses and drag chains, the inner wall is smooth and can follow the movement of the robot to expand and rotate
- Adaptation: Robot drag chain, robot hose

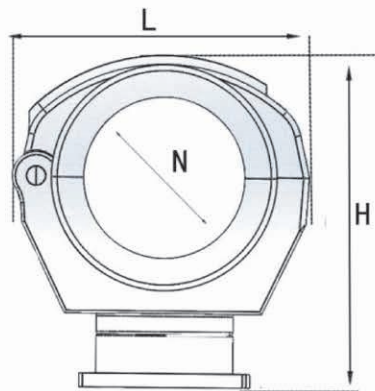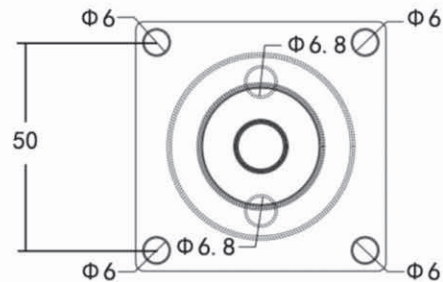



■ 产品选型参数表

威联科产品型号 Product model	适配拖链 drag chain	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	内径 inside	包装 Packing
			长.L	厚.W	高.H			
PN.	AD	AD	长.L	厚.W	高.H	A~B mm	内径.N	PCS
WLK-RGDMX-28A	R30	28×34.2	82	34	72	30~33	36	10
WLK-RGDMX-36A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGDMX-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGDMX-56A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGDMX-70A	R70	70×80.0	150	38	135	30~56	88	5

旋转定位固定支架

ROTATING POSITIONING FIXED BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙与铝
- 颜色:黑色
- 认证:CE、ROHS
- 性能:以铝制万向旋转盘为底座,连接定位固定
- 座支架,固定软管,可以实现跟随机器人万向旋转
- 适配:机器人波纹管
- Brand: Winlink
- Material: Modified Nylon and Aluminum
- Color: Black
- Authentication: CE、ROHS
- Performance: Equipped with robot hoses and drag chains, the hoses are fixed and can expand and rotate with the movement of the robot
- Adaptation: Robot drag chain, robot hose

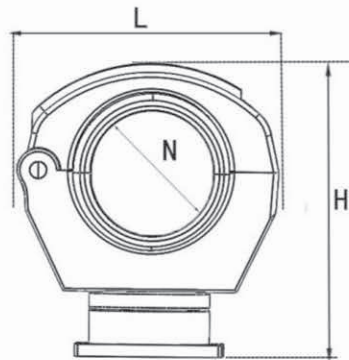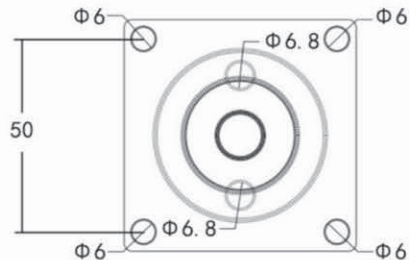



■ 产品选型参数表

威联科产品型号 Product model	适配拖链 drag chain	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	内径 inside	包装 Packing
			长.L	宽.W	高.H			
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGWMX-28A	R30	28×34.2	82	34	72	30~33	32	10
WLK-RGWMX-36A	R38	36×42.3	105	33	93	30~44	37	10
WLK-RGWMX-48A	R48	48×54.0	105	33	93	30~44	48.5	10
WLK-RGWMX-56A	R57	56×67.2	150	38	135	30~56	63	5
WLK-RGWMX-70A	R70	70×80.0	150	38	135	30~56	72	5

旋转前末端套筒支架

ROTATING FRONT END HOSE BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙与铝
- 颜色:黑色
- 认证:CE、ROHS
- 性能:以铝制万向旋转盘为底座,连接前末端固定座支架,可以实现跟随机器人万向旋转
- 适配:机器人波纹管
- Brand: Winlink
- Material: Modified Nylon and Aluminum
- Color: Black
- Authentication: CE、ROHS
- Performance: Equipped with robot hoses, fixed hose lines that can expand and rotate with the movement of the robot
- Adaptation: robot hose

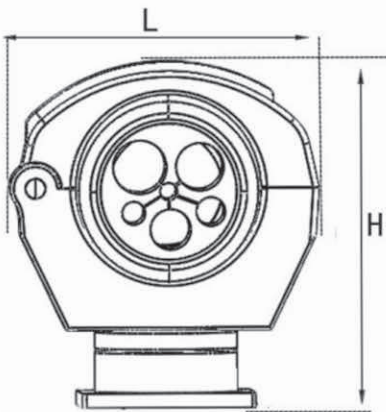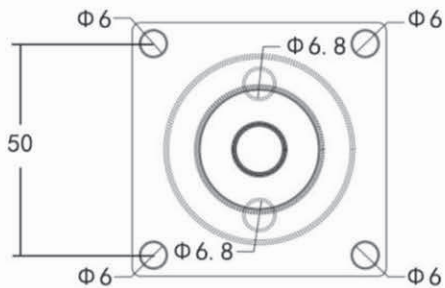



产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	孔数 holes	包装 Packing
PN.	AD	长.L	厚.W	高.H	A~B mm	N	PCS
WLK-RGFMX-23A	23×28.2	82	34	99	50	定制	10
WLK-RGFMX-28A	28×34.2	82	34	99	50	定制	10
WLK-RGFMX-36A	36×42.3	105	33	120	50	6孔	10
WLK-RGFMX-48A	48×54.0	105	33	120	50	6孔	10
WLK-RGFMX-56A	56×67.2	150	38	162	50	13孔	5
WLK-RGFMX-70A	70×80.0	150	38	162	50	13孔	5

旋转前末端配球支架

ROTATING FRONT END BALL BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙与铝
- 颜色:黑色
- 认证:CE、ROHS
- 性能:以铝制万向旋转盘为底座,连接分线前末端固定座支架,可以实现跟随机器人万向旋转
- 适配:机器人波纹管
- Brand: Winlink
- Material: Modified Nylon and Aluminum
- Color: Black
- Authentication: CE、ROHS
- Performance: Six axis robot hose, fixed outlet,can rotate with the robot's movement
- Adaptation: robot hose

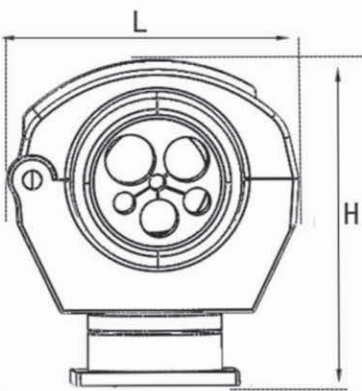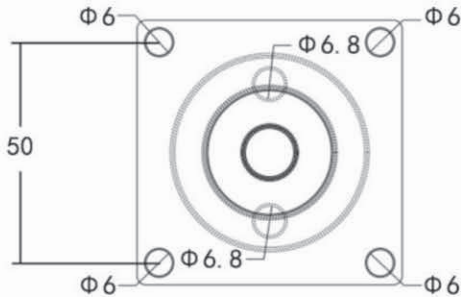


产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	孔数 holes	包装 Packing
PN.	AD	长.L	厚.W	高.H	A~B mm	N	PCS
WLK-RGEMX-23A	23×28.2	82	34	99	50	定制	10
WLK-RGEMX-28A	28×34.2	82	34	99	50	定制	10
WLK-RGEMX-36A	36×42.3	105	33	120	50	6孔	10
WLK-RGEMX-48A	48×54.0	105	33	120	50	7孔	10
WLK-RGEMX-56A	56×67.2	150	38	162	50	13孔	5
WLK-RGEMX-70A	70×80.0	150	38	162	50	13孔	5

铝配球固定支架
ALUMINUM HOSE BALL FIXING BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙与铝
- 颜色:黑色
- 认证:CE、ROHS
- 性能:6061铝一体冲压而成,工业机器人固定软管,具有强度高,耐腐蚀,轻量化等特点
- 适配:机器人波纹管
- Brand: Winlink
- Material: Modified Nylon and Aluminum
- Color: Black
- Authentication: CE、ROHS
- Performance: 6061 aluminum material, fixed robot hose, with high strength, corrosion resistance, lightweight and other characteristics
- Adaptation: robot hose

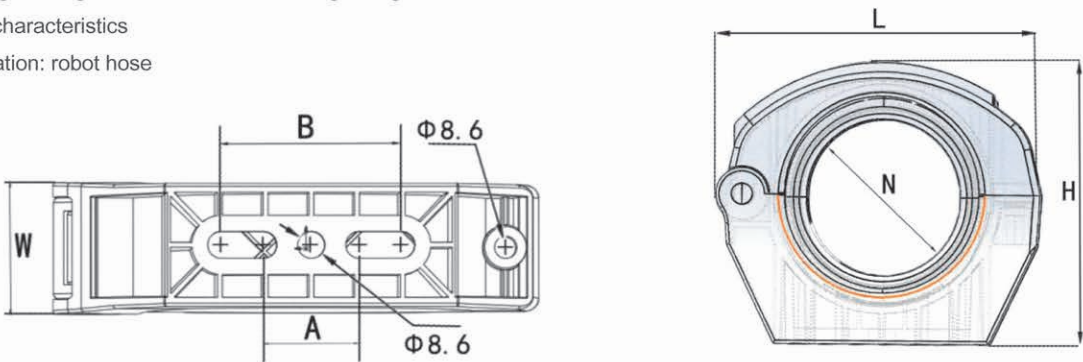


产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	内径 inside	包装 Packing
PN.	AD	长.L	宽.W	高.H	A~B mm	N mm	PCS
WLK-RGQLV-36A	36×42.3	105	33	93	30~44	37	10
WLK-RGQLV-48A	48×54.0	105	33	93	30~44	48.5	10
WLK-RGQLV-56A	56×67.2	150	38	135	30~56	63	5
WLK-RGQLV-70A	70×80.0	150	38	135	30~56	72	5

铝定位固定支架
ALUMINUM POSITIONING BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙与铝
- 颜色:黑色
- 认证:CE、ROHS
- 性能:6061铝一体冲压而成,工业机器人固定软管,具有强度高,耐腐蚀,轻量化等特点
- 适配:机器人波纹管
- Brand: Winlink
- Material: Modified Nylon and Aluminum
- Color: Black
- Authentication: CE、ROHS
- Performance: 6061 aluminum material, fixed robot hose, with high strength, corrosion resistance, lightweight and other characteristics
- Adaptation: robot hose


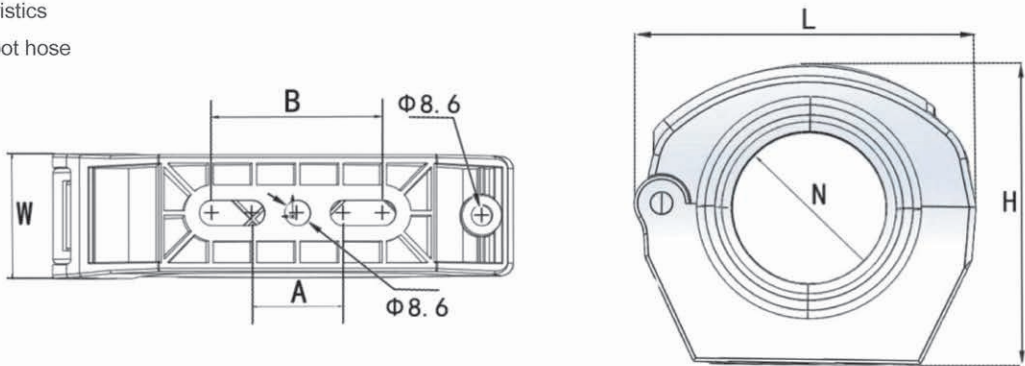


产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	内径 inside	包装 Packing
PN.	AD	长.L	宽.W	高.H	A~B mm	N mm	PCS
WLK-RGWLV-36A	36×42.3	105	33	93	30~44	37	10
WLK-RGWLV-48A	48×54.0	105	33	93	30~44	48.5	10
WLK-RGWLV-56A	56×67.2	150	38	135	30~56	63	5
WLK-RGWLV-70A	70×80.0	150	38	135	30~56	72	5

铝导向滑动支架
ALUMINUM GUIDED SLIDING BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙与铝
- 颜色:黑色
- 认证:CE、ROHS
- 性能:6061铝一体冲压而成, 机器人软管可自由伸缩滑动, 具有强度高, 耐腐蚀, 轻量化等特点
- 适配:机器人拖链管、机器人波纹管
- Brand: Winlink
- Material:Modified Nylon and Aluminum
- Color: Black
- Authentication: CE、ROHS
- Performance: 6061 aluminum material, flexible hose can slide freely, with high strength, corrosion resistance, light weight and other characteristics
- Adaptation: Robot drag chain, robot hose

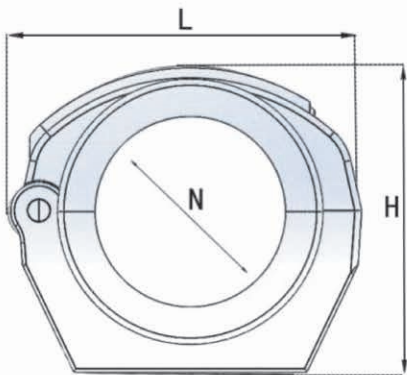
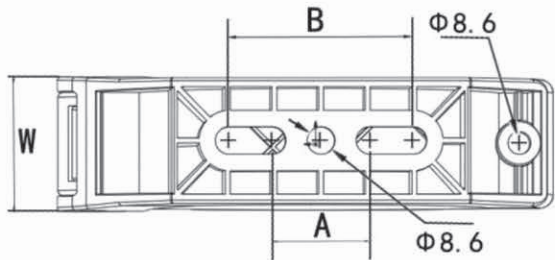


产品选型参数表

威联科产品型号 Product model	适配拖链 drag chain	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	内径 inside	包装 Packing
			长.L	宽.W	高.H			
PN.	AD	AD	长.L	宽.W	高.H	A~B mm	内径.N	PCS
WLK-RGDLV-28A	R30	28×34.2	82	34	72	30~33	36	10
WLK-RGDLV-36A	R38	36×42.3	105	33	93	30~44	45	10
WLK-RGDLV-48A	R48	48×54.0	105	33	93	30~44	58	10
WLK-RGDLV-56A	R57	56×67.2	150	38	135	30~56	88	5
WLK-RGDLV-70A	R70	70×80.0	150	38	135	30~56	88	5

铝前末端套筒固定支架
ALUMINUM FRONT END BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙与铝
- 颜色:黑色
- 认证:CE、ROHS
- 性能:6061铝一体冲压而成, 固定软管并分线, 具有强度高, 耐腐蚀, 轻量化等特点
- 适配:机器人波纹管
- Brand: Winlink
- Material:Modified Nylon and Aluminum
- Color: Black
- Authentication: CE、ROHS
- Performance: 6061 aluminum material, six axis fixed hose, with high strength, corrosion resistance, and lightweight characteristics
- Adaptation: robot hose

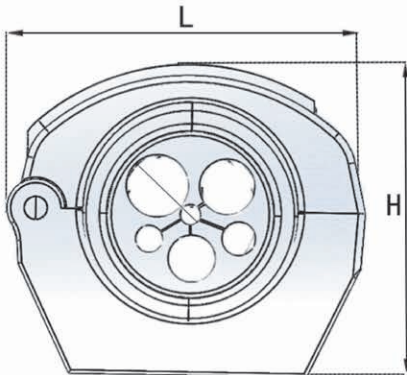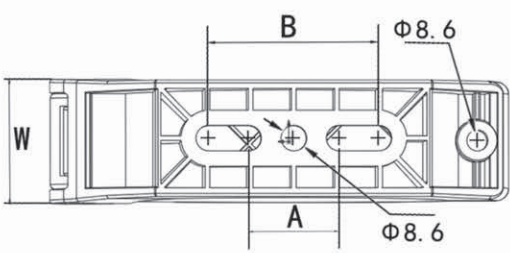



产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)				底座孔距 size(±0.5)	包装 Packing
		长.L	厚.W	高.H	孔数N		
PN.	AD	长.L	厚.W	高.H	孔数N	A~B mm	PCS
WLK-RGFLV-36A	36×42.3	105	33	93	6孔	30~44	10
WLK-RGFLV-48A	48×54.0	105	33	93	6孔	30~44	10
WLK-RGFLV-56A	56×67.2	150	38	135	13孔	30~56	5
WLK-RGFLV-70A	70×80.0	150	38	135	13孔	30~56	5

铝前末端配球支架

ALUMINUM FRONT END BALL BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙与铝
- 颜色:黑色
- 认证:CE、ROHS
- 性能:6061铝一体冲压而成,固定软管并分线,具有强度高,耐腐蚀,轻量化等特点
- 适配:机器人波纹管
- Brand: Winlink
- Material:Modified Nylon and Aluminum
- Color: Black
- Authentication: CE、ROHS
- Performance: 6061 aluminum material, six axis fixed hose, with high strength, corrosion resistance, and lightweight characteristics
- Adaptation: robot hose

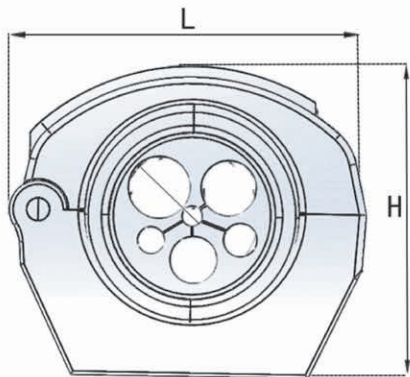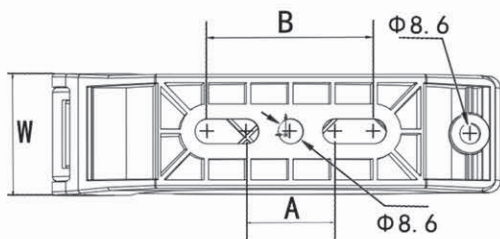


■ 产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	支架主体尺寸 Bracket size(±1)				底座孔距 size(±0.5)	包装 Packing
		长.L	厚.W	高.H	孔数N		
PN.	AD					A~B mm	PCS
WLK-RGXLV-36A	36×42.3	105	33	93	6孔	30~44	10
WLK-RGXLV-48A	48×54.0	105	33	93	7孔	30~44	10
WLK-RGXLV-56A	56×67.2	150	38	135	13孔	30~56	5
WLK-RGXLV-70A	70×80.0	150	38	135	13孔	30~56	5

协作配球抱箍支架

COLLABORATIVE ROBOT BALL BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙与不锈钢
- 认证:CE、ROHS
- 性能:抱箍锁紧机械手臂,支架固定波纹软管
- 适配:机器人波纹管

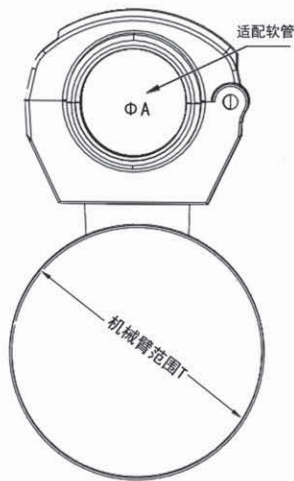

- Brand: Winlink
- Material: Modified Nylon and Stainless Steel
- Authentication: CE、ROHS
- Performance: Lock the robot arm with a clamp and secure the corrugated hose with a bracket
- Adaptation: robot hose



■ 产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	包装 Packing	可选锁紧范围 Locking range		
			T mm		
PN.	ΦA	PCS			
WLK-RGCPQ-23A	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGCPQ-28A	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCPQ-36A	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCPQ-48A	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGCPQ-56A	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCPQ-70A	70×80.0	5	162-174mm	其它接受定制	

协作滑动导向支架

COLLABORATIVE ROBOT SLIDING BRACKET

- 品牌:威联科/Winlink

■ 材料:改性尼龙与不锈钢

■ 认证:CE、ROHS

■ 性能:抱箍锁紧机械手臂, 支架内壁光滑, 软管可自由伸缩滑动。


■ 适配:机器人拖链, 机器人波纹管
- Brand: Winlink

■ Material: Modified Nylon and Stainless Steel

■ Authentication: CE、ROHS

■ Performance: Tighten the mechanical arm with a clamp, the inner wall of the bracket is smooth, and the hose can freely extend and slide.

■ Adaptation: Robot drag chain, robot hose

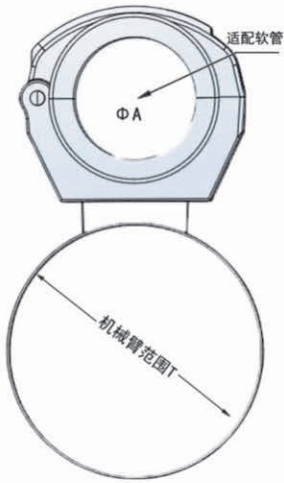

■ 产品选型参数表

威联科产品型号 Product model	适配拖链 drag chain	适配软管 Adapt hose	包装 Packing	可选锁紧范围 Locking range		
PN.	ΦA	ΦA	PCS	T mm		
WLK-RGCPD-23A	/	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGCPD-28A	R30	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCPD-36A	R38	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCPD-48A	R48	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGCPD-56A	R57	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCPD-70A	R70	70×80.0	5	162-174mm	其它接受定制	

协作定位固定支架

COLLABORATIVE ROBOT FIXED BRACKET

- 品牌:威联科/Winlink

■ 材料:改性尼龙与不锈钢

■ 认证:CE、ROHS

■ 性能:抱箍锁紧机械手臂, 支架固定波纹管


■ 适配:机器人波纹管
- Brand: Winlink

■ Material: Modified Nylon and Stainless Steel

■ Authentication: CE、ROHS

■ Performance: Lock the robot arm with a clamp and secure the corrugated hose with a bracket

■ Adaptation: robot hose

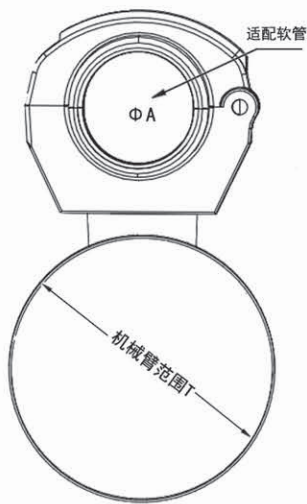

■ 产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	包装 Packing	可选锁紧范围 Locking range		
PN.	ΦA	PCS	T mm		
WLK-RGCPW-23A	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGCPW-28A	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCPW-36A	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCPW-48A	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGCPW-56A	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCPW-70A	70×80.0	5	162-174mm	其它接受定制	

协作前端套筒支架

COLLABORATIVE ROBOT FRONT-END SLEEVE BRACKET

- 品牌:威联科/Winlink

■ 材料:改性尼龙与不锈钢

■ 认证:CE、ROHS

■ 性能:抱箍锁紧机械手臂, 支架固定波纹软管并引导出线


■ 适配:机器人波纹管
- Brand: Winlink

■ Material: Modified Nylon and Stainless Steel

■ Authentication: CE、ROHS

■ Performance: Tighten the mechanical arm with a clamp, secure the corrugated hose with a bracket,and guide the outgoing line

■ Adaptation: robot hose

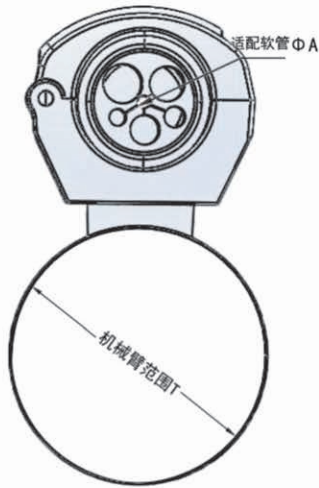

■ 产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	包装 Packing	可选锁紧范围 Locking range		
PN.	ΦA	PCS	T mm		
WLK-RGCPF-23A	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGCPF-28A	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCPF-36A	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCPF-48A	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGCPF-56A	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCPF-70A	70×80.0	5	162-174mm	其它接受定制	

协作前端配球支架

COLLABORATIVE ROBOT FRONT-END BALL BRACKET

- 品牌:威联科/Winlink

■ 材料:改性尼龙与不锈钢

■ 认证:CE、ROHS

■ 性能:抱箍锁紧机械手臂, 支架固定波纹软管并引导出线


■ 适配:机器人波纹管
- Brand: Winlink

■ Material: Modified Nylon and Stainless Steel

■ Authentication: CE、ROHS

■ Performance: Tighten the mechanical arm with a clamp, secure the corrugated hose with a bracket,and guide the outgoing line

■ Adaptation: robot hose

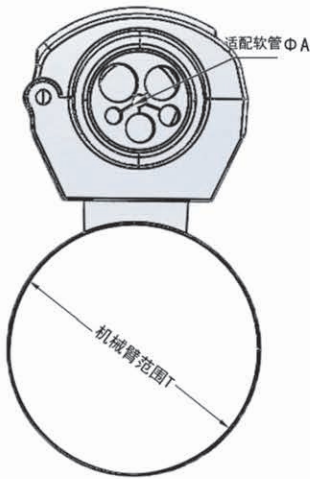

■ 产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	包装 Packing	可选锁紧范围 Locking range		
PN.	ΦA	PCS	T mm		
WLK-RGCQF-23A	23×28.2	10	56-59mm	60-63mm	64-67mm
WLK-RGCQF-28A	28×34.2	10	68-73mm	74-79mm	80-85mm
WLK-RGCQF-36A	36×42.3	10	86-91mm	92-97mm	98-103mm
WLK-RGCQF-48A	48×54.0	10	104-112mm	113-121mm	122-130mm
WLK-RGCQF-56A	56×67.2	5	131-139mm	140-148mm	149-161mm
WLK-RGCQF-70A	70×80.0	5	162-174mm	其它接受定制	

机器人魔术贴绑带

ROBOT HOSE STRAP

- 品牌:威联科/Winlink

■ 材料:尼龙魔术贴

■ 颜色:黑色, 其他定制

■ 性能:本款魔术贴绑带束紧范围大, 可通用各类协作机器人型号, 能有效束紧软管与包线布

■ 适配:机器人波纹管, 机器人包线布
- Brand: Winlink

■ Material: hook and loop

■ Color: Black, Other Customization

■ Performance:This Velcro strap has a wide tightening range and can be used for various collaborative robot models, effectively tightening hoses and wrapping fabrics

■ Adaptation: Robot hose, robot wrapping cloth



产品选型参数表

威联科产品型号 Product model	绑带长度 Strap length	绑带宽度 Strap width	单根最大捆扎直径 Maximum bundling diameter	包装 Packing
PN.	φA	PCS	T mm	PCS
WLK-RGPB-L500	500	25	136≥φ	10
WLK-RGPB-L600	600	25	168≥φ	10
WLK-RGPB-L700	700	25	200≥φ	10
WLK-RGPB-L800	800	25	230≥φ	10

协作绑带软管固定座

COLLABORATIVE STRAP HOSE FIXING SEAT

- 品牌:威联科/Winlink

■ 材料:尼龙魔术贴与改性橡胶

■ 颜色:黑色, 其他定制

■ 性能:本款魔术贴绑带束紧范围大, 可通用各类协作机器人型号, 橡胶块防滑设计, 能有效束紧软管

■ 适配:机器人波纹管
- Brand: Winlink

■ Material: Nylon Velcro and Modified Rubber

■ Color: Black, Other Customization

■ Performance:This Velcro strap has a wide tightening range and can be used for various collaborative robot models. The rubber block anti slip can effectively tighten the hose

■ Adaptation: Robot hose



产品选型参数表

威联科产品型号 Product model	威联科产品型号			
	WLK-RGCPB-L500	WLK-RGCPB-L600	WLK-RGCPB-L700	WLK-RGCPB-L800
	束紧范围mm	束紧范围mm	束紧范围mm	束紧范围mm
φ17*21.0	≤98	≤130	≤162	≤193
φ20*25.0	≤98	≤130	≤162	≤193
φ23*28.2	≤98	≤130	≤162	≤193
φ28*34.2	≤95	≤128	≤160	≤191
φ36*42.3	≤85	≤116	≤148	≤180
φ48*54.0	≤80	≤112	≤145	≤175
φ56*67.2	≤65	≤96	≤128	≤160
φ70*80.0	≤50	≤80	≤110	≤145

协作绑带配球固定座

BINDING HOSE FIXING BRACKET

- 品牌:威联科/Winlink
- 材料:尼龙魔术贴与改性尼龙
- 性能:本款魔术贴绑带束紧范围大,可通用各类协作机器人型号,配合支架可有效锁紧软管
- 适配:机器人拖链, 机器人波纹管
- Brand: Winlink
- Material: Nylon Velcro and Modified Nylon
- Performance:Wide tightening range, compatible with various collaborative robot models, and the bracket can effectively lock the hose
- Adaptation: Robot drag chain, robot hose




产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	束紧范围 Locking range	绑带长度 Strap length	包装 Packing
PN.	AD	mm	mm	PCS
WLK-RGCPQ-23A-L500	23×28.2	≤98	500	10
WLK-RGCPQ-28A-L500	28×34.2	≤95	500	10
WLK-RGCPQ-36A-L500	36×42.3	≤85	500	10
WLK-RGCPQ-48A-L500	48×54.0	≤80	500	10
WLK-RGCPQ-23A-L600	23×28.2	≤130	600	10
WLK-RGCPQ-28A-L600	28×34.2	≤128	600	10
WLK-RGCPQ-36A-L600	36×42.3	≤116	600	10
WLK-RGCPQ-48A-L600	48×54.0	≤112	600	10
WLK-RGCPQ-23A-L700	23×28.2	≤162	700	10
WLK-RGCPQ-28A-L700	28×34.2	≤160	700	10
WLK-RGCPQ-36A-L700	36×42.3	≤148	700	10
WLK-RGCPQ-48A-L700	48×54.0	≤145	700	10
WLK-RGCPQ-23A-L800	23×28.2	≤193	800	10
WLK-RGCPQ-28A-L800	28×34.2	≤191	800	10
WLK-RGCPQ-36A-L800	36×42.3	≤180	800	10
WLK-RGCPQ-48A-L800	48×54.0	≤175	800	10

单尼龙固定支架

SINGLE NYLON FIXED BRACKET

- 品牌:威联科/Winlink
- 材料:改性尼龙
- 颜色:黑色
- 认证:CE, ROHS
- 性能:通配WINLINK管线包零部件产品
- 应用:工业机器人
- Brand: Winlink
- Material: Modified Nylon
- Color: Black
- Authentication : CE、ROHS
- Performance: Tongpai Weilianke Pipeline Package Parts Products
- Applications: Industrial robots

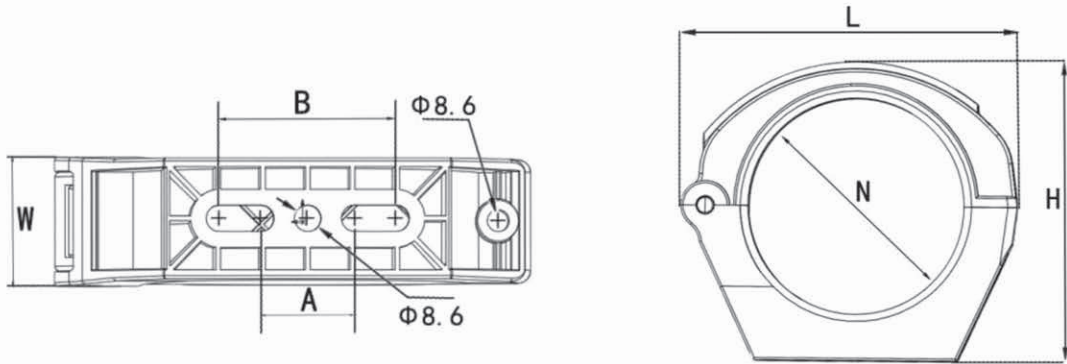

产品选型参数表

威联科产品型号 Product model	适配内夹 Adapt clamp	支架本体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	内径 inside	包装 Packing
PN.	M	长.L	厚.W	高.H	A ~ B mm	N mm	PCS
WLK-RGQM-23/28A	R23/28	82	34	72	30~33	45	10
WLK-RGQM-36/48A	R36/48	105	33	93	30~44	65	10
WLK-RGQM-56/70A	R56/70	150	38	135	30~56	99	5
WLK-RGQM-95A	R95	188	49	170	52/89	120	5

单铝制固定支架

SINGLE ALUMINUM FIXED BRACKET

- 品牌:威联科/Winlink

■ 材料:铝制

■ 颜色:黑色

■ 性能:6061铝一体冲压而成,耐腐蚀,轻量化通配

WINLINK管线包零部件产品

■ 应用:工业机器人


■ Brand: Winlink

■ Material: aluminium

■ Color: Black

■ Performance:6061 aluminum one-piece stamping, corrosion-resistant, lightweight, compatible with WINLINK pipeline package parts products

■ Applications: Industrial robots

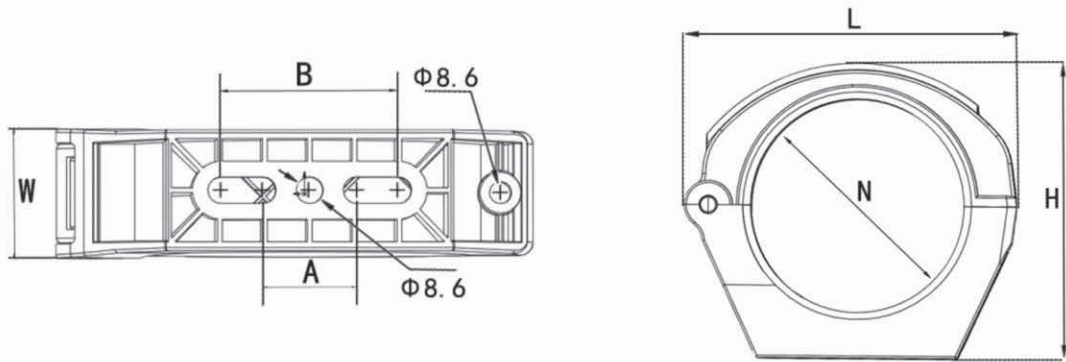

■ 产品选型参数表

威联科产品型号 Product model	适配内夹 Adapt clamp	支架本体尺寸 Bracket size(±1)			底座孔距 size(±0.5)	内径 inside	包装 Packing
		长.L	宽.W	高.H			
PN.	A				A ~ B mm	N mm	PCS
WLK-RGLV-36/48A	R36/48	105	31	93	93	65	10
WLK-RGLV-56/70A	R56/70	150	38	135	135	99	5

波纹管摩擦球

BELLOWS FRICTION BALL

- 品牌:威联科/Winlink

■ 材料:改性尼龙

■ 认证:符合CE和ROHS

■ 颜色:黑色

■ 性能:耐摩擦与撞击,钢性强,耐腐蚀性好

■ 适配:机器人波纹管

■ Brand: Winlink


■ Material: Modified Nylon

■ Authentication : CE、ROHS

■ Color: Black

■ Performance:Resistant to friction and impact, strong rigidity, and good corrosion resistance

■ Adaptation: robot hose

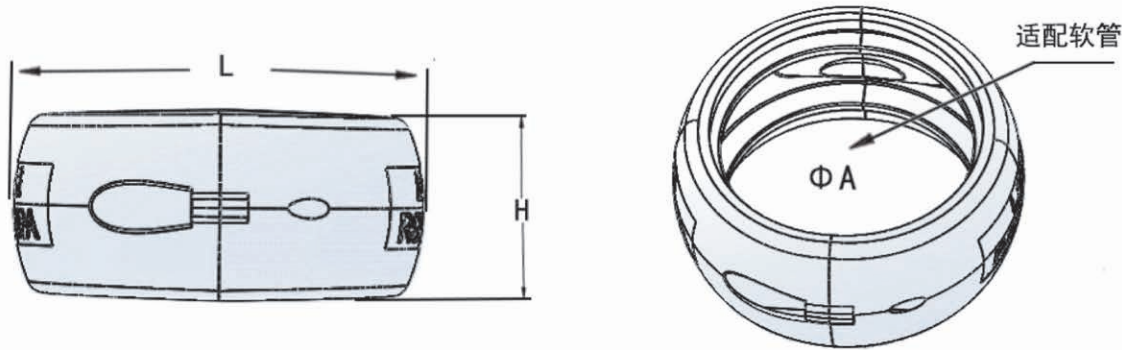


■ 产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	配件主体尺寸 Bracket size(±1)		内径 inside	包装 Packing
		长.L	高.H		
PN.	ΦA			N mm	PCS
WLK-RGQ-23A	23×28.2	53	35	27	50
WLK-RGQ-28A	28×34.2	53	35	32	50
WLK-RGQ-36A	36×42.3	70	47	37	20
WLK-RGQ-48A	48×54.0	70	36	48.5	20
WLK-RGQ-56A	56×67.2	103	47	63	5
WLK-RGQ-70A	70×80.0	103	47	72	5
WLK-RGQ-95A	95×106.0	126	66	97	1

定位环内夹

HOSE FIXING RING

- 品牌:威联科/Winlink
- 材料:改性尼龙
- 颜色:黑色
- 认证:CE、ROHS
- 性能:管线包配件, 配合支架使用, 固定软管
- 适配:机器人波纹管
- Brand: Winlink
- Material: Modified Nylon
- Color: Black
- Authentication: CE、ROHS
- Performance: Pipe package accessories, used in conjunction with brackets to secure hoses
- Adaptation: robot hose

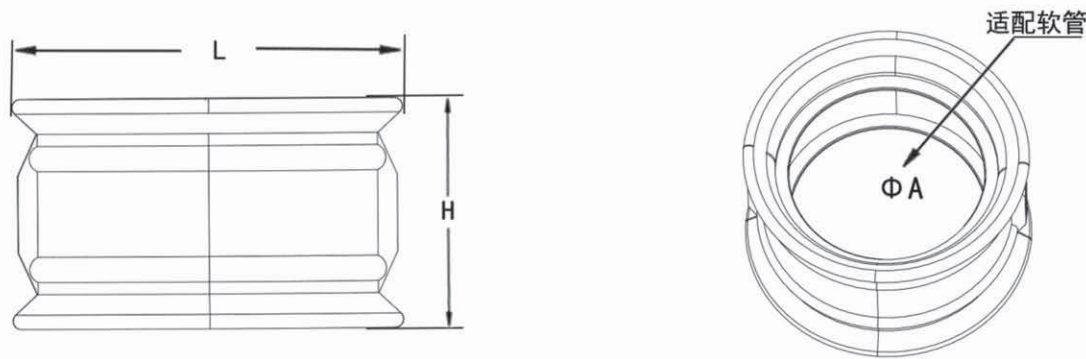


■ 产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	配件主体尺寸 Bracket size(±1)		内径 inside	包装 Packing
		长.L	高.H		
PN.	ΦA			N mm	PCS
WLK-RGDW-36A	36×42.3	71	42	37	20
WLK-RGDW-48A	48×54.0	71	42	48.5	20
WLK-RGDW-56A	56×67.2	104	44	63	10
WLK-RGDW-70A	70×80.0	104	44	72	10

滑动导向套筒

HOSE SLIDING SLEEVE

- 品牌:威联科/Winlink
- 材料:改性尼龙
- 颜色:黑色
- 认证:CE、ROHS
- 性能:管线包配件, 配合支架使用, 使软管在套筒内可自由滑动伸缩
- 适配:机器人波纹管, 机器人拖链管
- Brand: Winlink
- Material: Modified Nylon
- Color: Black
- Authentication: CE、ROHS
- Performance: Supporting fixed bracket integrated guiding fixed bracket, flexible hose can slide freely, double horn mouth design, smooth inner wall
- Adaptation: Robot drag chain, robot hose

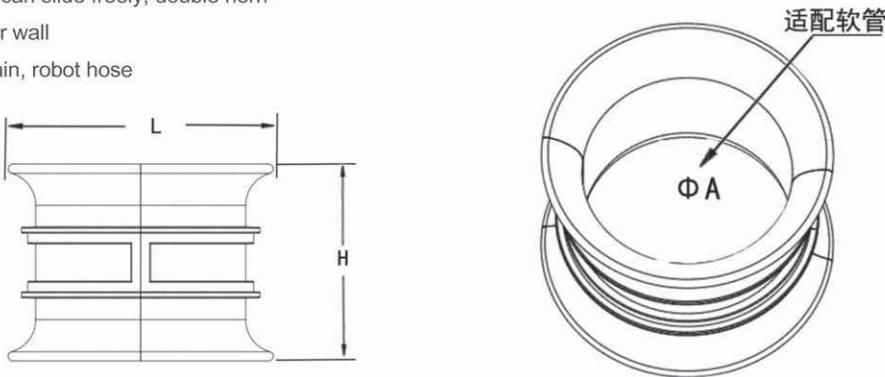

■ 产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	配件主体尺寸 Bracket size(±1)		内径 inside	包装 Packing
		长.L	高.H		
PN.	ΦA			N mm	PCS
WLK-RGDX-28A	28×34.2	60	50	36	20
WLK-RGDX-36A	36×42.3	80	60	45	20
WLK-RGDX-48A	48×54.0	80	60	58	20
WLK-RGDX-56A	56×67.2	112	62	88	10
WLK-RGDX-70A	70×80.0	112	62	88	10

喇叭口前端套筒

FRONT END SLEEVE

- 品牌:威联科/Winlink

■ 材料:改性尼龙

■ 颜色:黑色

■ 认证:CE、ROHS

■ 性能:管线包配件, 配合支架使用, 用于六轴固定软管并配合分线

■ 适配:机器人波纹管
- Brand: Winlink


■ Material: Modified Nylon

■ Color: Black

■ Authentication: CE、ROHS

■ Performance: Pipe package accessories, used in conjunction with brackets, for six axes

■ Adaptation: robot hose

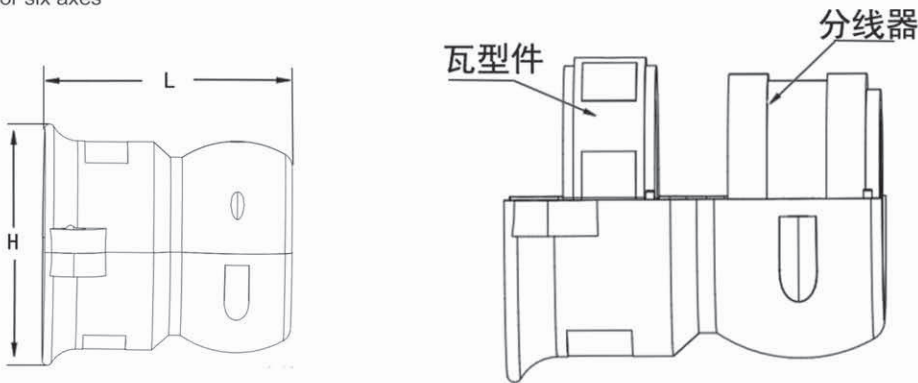

产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	配件主体尺寸 Bracket size(±1)		球径 Size	包装 Packing
PN.	AD	长.L	高.H	N mm	PCS
WLK-RGQD-28A	28×34.2	57	53	53	50
WLK-RGQD-36/48A	36×42.3	83	84	69	10
WLK-RGQD-56/70A	56×67.2	107	109	103	5

活动瓦型件

ROBOT TILE SHAPED PARTS

- 品牌:威联科/Winlink

■ 材料:改性尼龙

■ 颜色:黑色

■ 认证:CE、ROHS

■ 性能:管线包配件, 配合支架使用, 用于六轴

■ 应用:工业机器人, 协作机器人

■ 适配:机器人波纹管
- Brand: Winlink

■ Material: Modified Nylon


■ Color: Black

■ Authentication: CE、ROHS

■ Performance: Pipe package accessories, used in conjunction with brackets, for six axes

■ Applications: Industrial robots, collaborative robots

■ Adaptation: robot hose

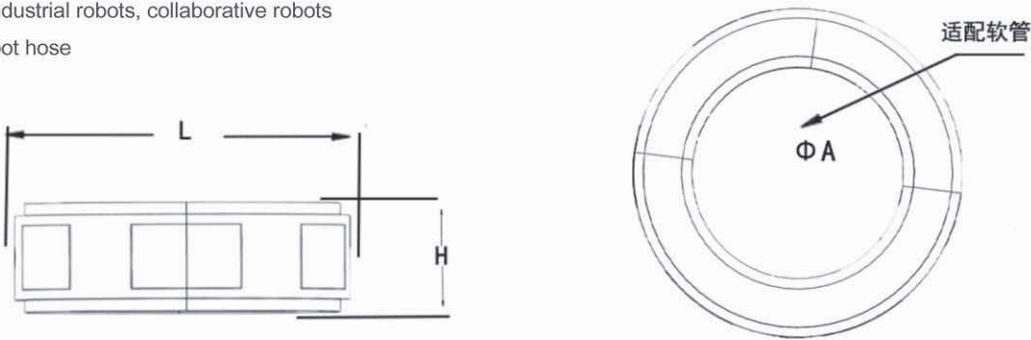




产品选型参数表

威联科产品型号 Product model	适配软管 Adapt hose	配件主体尺寸 Bracket size(±1)		内径 inside	包装 Packing
PN.	AD	长.L	高.H	N mm	PCS
WLK-RGWX-36A	36×42.3	62	20	39	50
WLK-RGWX-48A	48×54.0	62	20	50	50
WLK-RGWX-56A	56×67.2	92	28	60	20
WLK-RGWX-70A	70×80.0	92	28	74	20

套筒用分线器

SOCKET INTERNAL SPLITTER

- 品牌:威联科/Winlink
- 材料:改性橡胶
- 颜色:黑色
- 认证:CE、ROHS
- 性能:管线包配件, 配合支架使用在六轴分线
- 应用:工业机器人, 协作机器人
- Brand: Winlink
- Material: Modified rubber
- Color: Black
- Authentication: CE、ROHS
- Performance: Pipe package accessories, used in conjunction with brackets, for dividing lines
- Applications: Industrial robots, collaborative robots

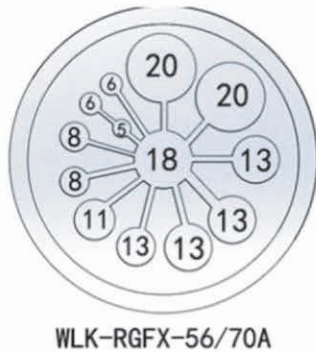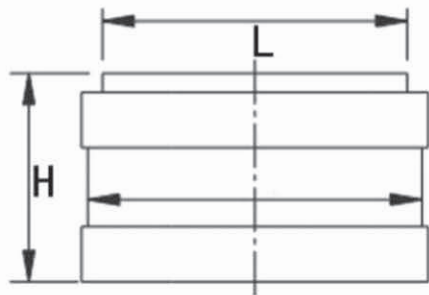



产品选型参数表

威联科产品型号 Product model	配件主体尺寸 Bracket size(±1)		多孔尺寸 Multi hole size	包装 Packing
	长.L	高.H		
PN.	长.L	高.H	mm	PCS
WLK-RGFX-28A	39.0	22.0	实心款, 可定制开孔	10
WLK-RGFX-36/48A	54.5	32.5	标准款: 18/16/13/10/8/6	10
WLK-RGFX-56/70A	84.0	43.0	标准款: 2*20/18/4*13/11/2*8/2*6/5	5

摩擦球分线器

FRICITION BALL SPLITTER

- 品牌:威联科/Winlink
- 材料:改性橡胶
- 颜色:黑色
- 认证:CE、ROHS
- 性能:管线包配件, 配合摩擦球使用在六轴分线
- 应用:工业机器人, 协作机器人
- Brand: Winlink
- Material: Modified rubber
- Color: Black
- Authentication: CE、ROHS
- Performance: Pipe package accessories, used in conjunction with friction balls for six axis branch lines
- Applications: Industrial robots, collaborative robots

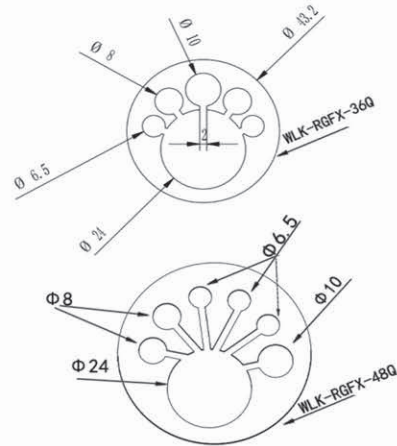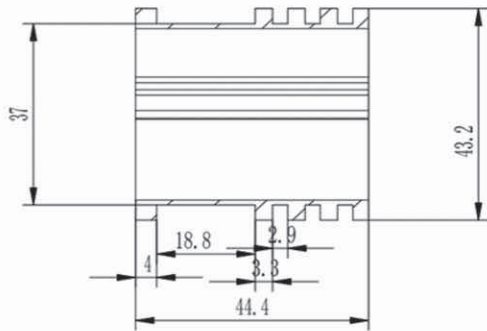


产品选型参数表

威联科产品型号 Product model	配件主体尺寸 Bracket size(±1)		多孔尺寸 Multi hole size	包装 Packing
	长.L	高.H		
PN.	长.L	高.H	mm	PCS
WLK-RGFX-36Q	44	44	标准: 24/10/2*8/2*6.5	10
WLK-RGFX-48Q	44	44	标准: 24/10/2*8/3*6.5	10
WLK-RGFX-70Q	44	44	标准: 4*19.5/16/4*13/9	5

工业机器人六轴网球拍

INDUSTRIAL ROBOT FLANGE CONNECTOR

- 品牌:威联科/Winlink
 - 材料:钣金喷塑
 - 颜色:黑色
 - 性能:机器人六轴连接法兰盘,可随机器人运动而转动,实现软管与前端完美连接
 - 应用:工业机器人,协作机器人
- Brand: Winlink
 - Material: Sheet metal spray coating
 - Color: Black
 - Performance: Matching friction ball, fixed bracket integrated with ball matching front end fixed bracket
 - Applications: Industrial robots, collaborative robots

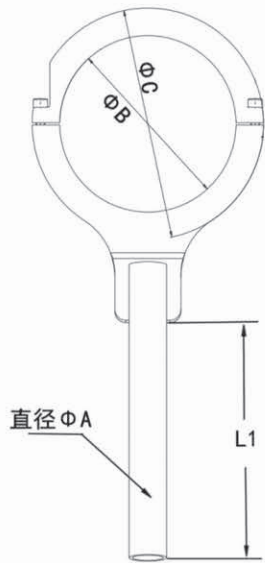


■ 产品选型参数表

威联科产品型号 Product model	手柄直径 diameter	法兰圈内径 inside	法兰圈外径 outside	手柄长度 length
PN.	ΦA mm	ΦB mm	ΦC mm	L1 mm
WLK-RGWQP-125	27	125	170	160
WLK-RGWQP-140	34	140	190	200
WLK-RGWQP-160	34	160	210	200
WLK-RGWQP-180	34	180	210	200
WLK-RGWQP-190	34	190	250	220
WLK-RGWQP-200	34	200	250	220
WLK-RGWQP-220	34	220	270	220

协作机器人六轴网球拍

COLLABORATE ROBOT FLANGE CONNECTOR

- 品牌:威联科/Winlink
 - 材料:钣金喷塑
 - 颜色:黑色
 - 性能:协作机器人六轴连接法兰盘,可随机器人运动而转动,实现软管与前端完美连接
 - 应用:工业机器人,协作机器人
- Brand: Winlink
 - Material: Sheet metal spray coating
 - Color: Black
 - Performance: Matching friction ball, fixed bracket integrated with ball matching front end fixed bracket
 - Applications: Industrial robots, collaborative robots

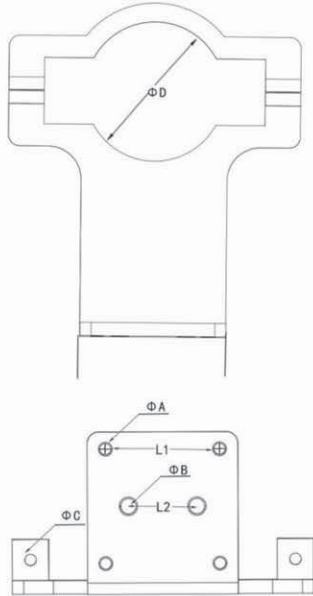

■ 产品选型参数表



威联科产品型号 Product model	孔距		直径			
	L1	L2	ΦA	ΦB	ΦC	ΦD
PN.	mm	mm	mm	mm	mm	mm
WLK-RGWQP-50	50	30	M6	M8	M6	50
WLK-RGWQP-63	50	30	M6	M8	M6	63

本款协作机器人六轴网球拍可以根据机器人型号定制

六轴固定块连接器

SIX AXIS FIXED CONNECTOR

- 品牌:威联科/Winlink
 - 材料:铝制喷塑
 - 颜色:黑色
 - 性能:一端连接六轴网球拍,一端连接前端固定支架,集成为管线包前端系统
- Brand: Winlink
 - Material: Aluminum spray coating
 - Color: Black
 - Performance: One end is connected to a six axis tennis racket, and the other end is connected to a front fixed bracket, integrated into a pipeline package front-end system

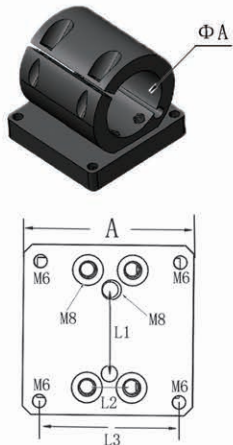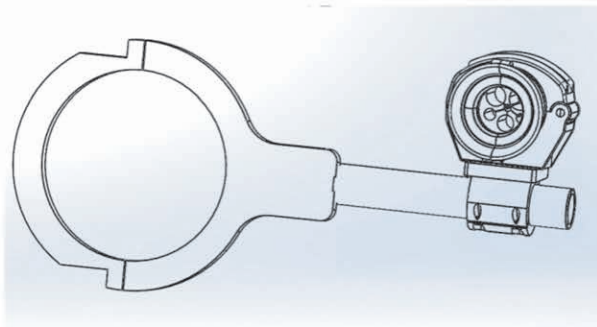


产品选型参数表

威联科产品型号 Product model	孔距		直径	
	L1	L3	ΦA	A
PN.	mm	mm	mm	mm
WLK-RGDK-27	30	50	27	8
WLK-RGDK-34	30	50	34	8

万向铝制旋转盘

UNIVERSAL ALUMINUM ROTATING DISC

- 品牌:威联科/Winlink
 - 材料:铝制喷塑
 - 颜色:黑色
 - 性能:铝喷塑,耐腐蚀,刚性强,轻量化
 - 应用:工业机器人,协作机器人
- Brand: Winlink
 - Material: Aluminum spray coating
 - Color: Black
 - Performance: Aluminum spray coating, corrosion-resistant, strong rigidity, lightweight
 - Applications: Industrial robots, collaborative robots

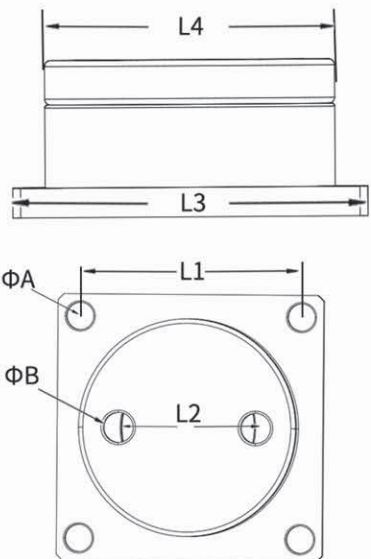



产品选型参数表

威联科产品型号 Product model	孔距		直径		内径	
	L1	L2	L3	L4	ΦA	ΦB
PN.	mm	mm	mm	mm	mm	mm
WLK-RGMX-T60	50	30	60	49	6	M8

三轴伸缩弹簧

THREE AXIS TELESCOPIC SPRING

- 品牌:威联科/Winlink
- 材料:硅锰弹簧钢/60Si2Mn
- 性能:硅锰弹簧钢制成,拉伸回弹效果好,可长时间保持伸缩状态
- 应用:工业机器人,协作机器人
- Brand: Winlink
- Material: 60Si2Mn
- Performance: Silicon manganese spring steel, with good tensile rebound effect
- Applications: Industrial robots

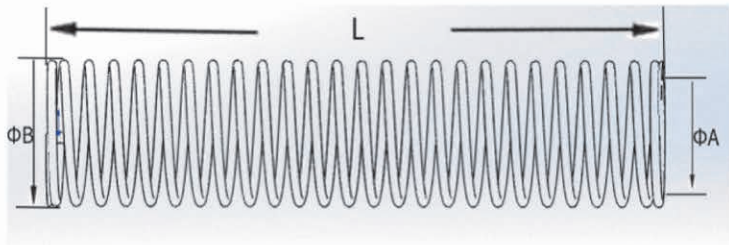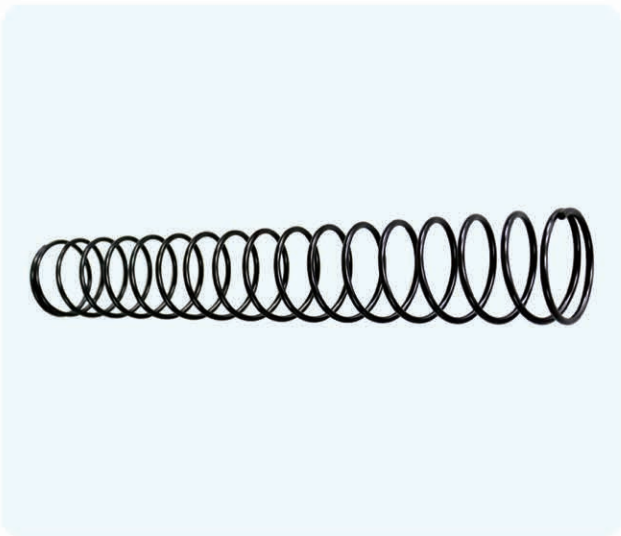

产品选型参数表

威联科产品型号 Product model	内径 inside diameter	外径 outside diameter	总长度 length	厚度 thickness	伸缩量 Expansion
PN.	ΦA mm	ΦB mm	ΦC mm	mm	mm
WLK-RGSC-36	52	59	400	4	300
WLK-RGSC-48	66	75	500	5	350
WLK-RGSC-70	90	100	800	6	400

导轨弹簧伸缩盒

RAIL SPRING TELESCOPIC BOX

- 品牌:威联科/Winlink
- 材料:钣金喷漆
- 颜色:黑色,蓝色
- 性能:一体压铸成型,内置导轨及弹簧,伸缩回弹性能优越,配套威联科固定支架集成三轴伸缩系统,广泛应用于各种型号机器人
- 应用:工业机器人
- Brand: Winlink
- Material: Sheet metal painting
- Color: Black, Blue
- Performance: Superior telescopic rebound performance, equipped with Winlink fixed bracket integrated three-axis telescopic system
- Applications: Industrial robots



产品选型参数表


威联科产品型号 Product model	适配软管 Adapted hose	安装孔距 hole spacing	包装 package
PN.	Φ mm	mm	pcs
WLK-RGDG-36A	36×42.3	30	1
WLK-RGDG-48A	48×54.0	30	1
WLK-RGDG-56A	56×67.2	30	1
WLK-RGDG-70A	70×80.0	30	1

建议标配:导轨盒*1,导向支架*1,配球支架*2,延长钣金*1

U型弹簧伸缩盒

U-SHAPED SPRING TELESCOPIC BOX

- 品牌:威联科/Winlink
- 材料:改性尼龙
- 颜色:黑色,灰色
- 性能:改性尼龙制成,内置限位球及弹簧,伸缩回弹性能优越,广泛应用于各种型号机器人
- 应用:工业机器人,协作机器人
- Brand: Winlink
- Material: Modified Nylon
- Color: Black, Grey
- Performance: Built in limit ball and spring, with superior telescopic rebound performance
- Applications: Industrial robots, collaborative robots

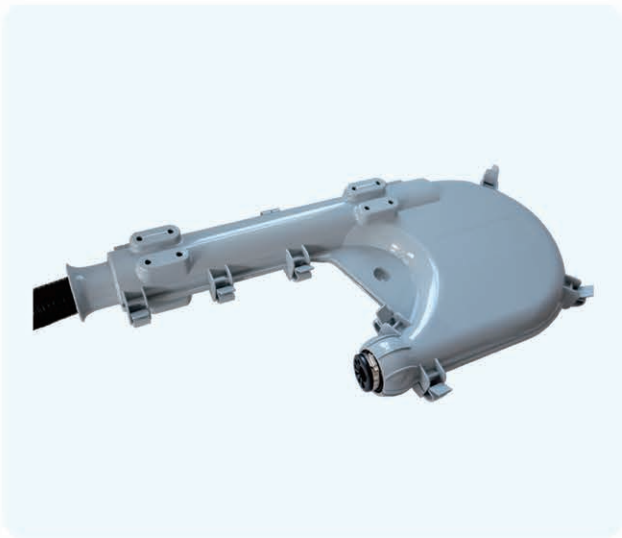

钣金弹簧伸缩盒

SHEET METAL SPRING EXPANSION BOX

- 品牌:威联科/Winlink
- 材料:钣金喷漆
- 颜色:黑色
- 性能:优质钣金制成,内置限位球及弹簧,伸缩回弹性能优越,广泛应用于各种型号机器人
- 应用:工业机器人
- Brand: Winlink
- Material: Sheet metal painting
- Color: Black
- Performance: Made of high-quality sheet metal, with built-in limit balls and springs, superior stretchability and rebound performance
- Applications: Industrial robots



■ 产品选型参数表

威联科产品型号 Product model	适配软管 Adapted hose	安装结构 structure	包装 package
PN.	Φ mm		pcs
WLK-RGLH-36A	36×42.3	一体式	1
WLK-RGLH-48A	48×54.0	一体式	1
WLK-RGLH-70A	70×80.0	一体式	1
WLK-RGLH-36B	36×42.3	分体式	1
WLK-RGLH-48B	48×54.0	分体式	1
WLK-RGLH-70B	70×80.0	分体式	1

建议标配:A型(U型盒体*1,弹簧*1,限位球*1,固定球*1)

B型(U型盒体*1,弹簧*1,限位球*1,固定球*1,分线器*1)

■ 产品选型参数表

威联科产品型号 Product model	适配软管 Adapted hose	安装结构 mounting structure	包装 package
PN.	Φ mm	/	pcs
WLK-RGTH-36A	36×42.3	组装式	1
WLK-RGTH-48A	48×54.0	组装式	1
WLK-RGTH-70A	70×80.0	组装式	1

建议标配:定制大钣金*1,罩盖钣金*1,延长钣金*1,弹簧*1,限位球*1,导向支架*2,配球支架*1

耐磨阻燃机器人包线布

WEAR RESISTANT ROBOT CONDUIT

- 品牌:威联科/Winlink

■ 材料:凯拉夫纤维, 魔术贴

■ 颜色:浅灰色

■ 性能:防飞溅, 阻燃, 耐磨, 防水, 耐高温

■ 应用:工业机器人, 协作机器人
- Brand: Winlink

■ Material:Kailaf fiber, Velcro

■ Color: Light Grey

■ Performance: Splash proof, flame retardant, wear-resistant, waterproof, high temperature resistant

■ Applications: Industrial robots, collaborative robots



产品选型参数表

威联科产品型号 Product model	布展宽度 width	直径 diameter	整盒长度 length
PN.	Φ mm	Φ mm	米/M
WLK-RGNW-15G	75	15	25M
WLK-RGNW-20G	84	20	25M
WLK-RGNW-25G	100	25	25M
WLK-RGNW-30G	115	30	25M
WLK-RGNW-40G	147	40	25M
WLK-RGNW-50G	183	50	25M
WLK-RGNW-60G	220	60	25M
WLK-RGNW-70G	246	70	25M
WLK-RGNW-100G	340	100	25M

阻燃机器人包线布

FIREPROOF ROBOT CONDUIT

- 品牌:威联科/Winlink

■ 材料:尼龙/PVC

■ 颜色:黑色

■ 性能:阻燃, 防水, 耐磨, 耐温, 牢固


■ 应用:工业机器人, 协作机器人
- Brand: Winlink

■ Material: Nylon/PVC

■ Color: Black

■ Performance: Flame retardant, waterproof, wear-resistant, temperature resistant

■ Applications: Industrial robots, collaborative robots

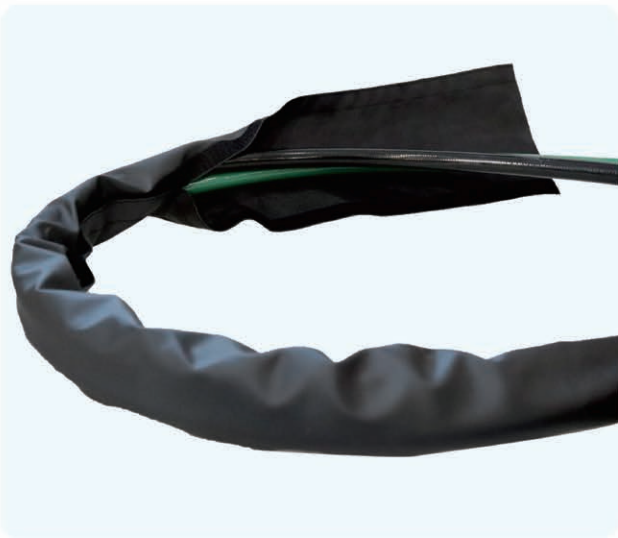

产品选型参数表

威联科产品型号 Product model	内径 withinφ	适用内径 In useφ	布展宽度 width	厚度 thickness	整盒长度 box length
PN.	Φ mm	Φ mm	Φ mm	Φ mm	米/M
WLK-RGNT-15B	15	14-15	75	0.7	50M
WLK-RGNT-20B	20	17-20	90	0.7	50M
WLK-RGNT-25B	25	21-25	105	0.7	50M
WLK-RGNT-30B	30	26-30	120	0.7	50M
WLK-RGNT-35B	35	31-35	140	0.7	50M
WLK-RGNT-40B	40	36-40	155	0.7	50M
WLK-RGNT-50B	50	41-50	185	0.7	50M
WLK-RGNT-60B	60	51-60	220	0.7	50M
WLK-RGNT-70B	70	61-70	245	0.7	50M
WLK-RGNT-80B	80	71-80	280	0.7	50M
WLK-RGNT-90B	90	81-90	310	0.7	50M
WLK-RGNT-100B	100	91-100	345	0.7	50M

扣式机器人包线布

BUTTON STYLE ROBOT CONDUIT

- 品牌:威联科/Winlink

■ 材料:尼龙/PVC

■ 颜色:黑色

■ 性能:阻燃, 防水, 耐磨, 耐温, 牢固

■ 应用:工业机器人, 协作机器人
- Brand: Winlink

■ Material: Nylon/PVC

■ Color: Black

■ Performance: Flame retardant, waterproof, wear-resistant, temperature resistant

■ Applications: Industrial robots, collaborative robots



产品选型参数表

威联科产品型号 Product model	宽度 width	束径 In useφ	整盒长度 box length
PN.	mm	mm	米/M
WLK-RGNK-10B	57	10	50M
WLK-RGNK-15B	75	15	50M
WLK-RGNK-20B	90	20	50M
WLK-RGNK-25B	100	25	50M
WLK-RGNK-30B	115	30	50M
WLK-RGNK-40B	146	40	50M
WLK-RGNK-50B	175	50	50M
WLK-RGNK-70B	241	70	50M
WLK-RGNK-100B	333	100	50M

工业软管及管接头展示

INDUSTRIAL HOSES AND PIPE FITTINGS DISPLAY



尼龙波纹管



快速管接头



快速管弯头



金属牙快速接头



内牙快速接头



防水软管接头



不锈钢防水管接头



防水软管弯头



内牙防水管接头



加长内牙防水接头



带锁紧快速接头



带锁紧快速弯头



带锁紧防水接头



带锁紧金属接头



带锁紧组合接头



万向旋转防水接头



万向旋转快速接头



90度万向旋转接头



45度万向旋转接头



法兰软管弯头



法兰软管接头



法兰卧式支架



简易固定支架



波纹管护套




三通软管接头

工业电缆格兰头展示

INDUSTRIAL CABLE WATERPROOF GLAND DISPLAY

				
尼龙防爆接头	尼龙防水接头	尼龙防折弯接头	尼龙防水弯头	内牙防水接头
				
不锈钢防水接头	接管不锈钢接头	双锁紧不锈钢接头	不锈钢防水弯头	大型不锈钢接头
				
铜镍防水接头	防磁波铜镍接头	双锁紧铜镍接头	接管铜镍接头	90度铜镍弯头
				
防爆不锈钢闷盖	铜镍圆形闷盖	铜镍六角闷盖	尼龙圆形闷盖	尼龙六角闷盖
				
金属缩径环系列	金属扩径环系列	尼龙缩径环系列	尼龙扩径环系列	尼龙对接环系列

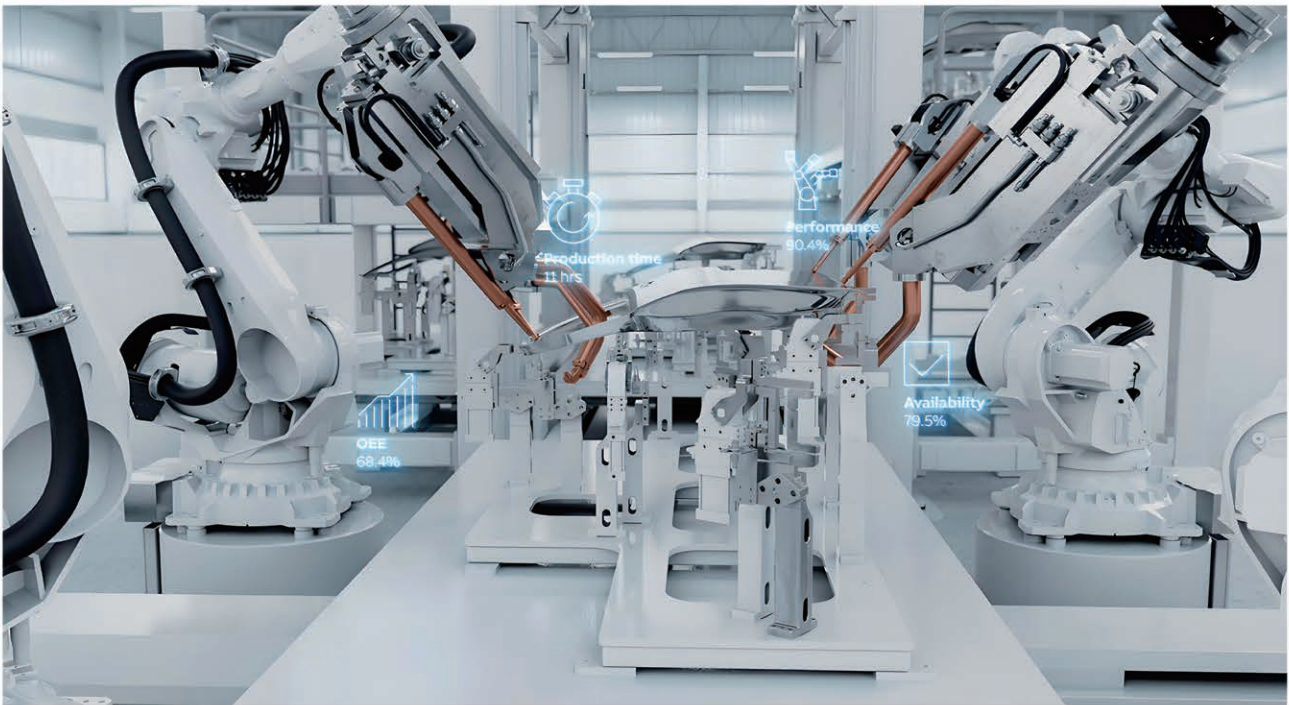

威联科产品应用/WINLINK product application

汽车制造 Automobile manufacturing
储能行业 Energy storage industry
数控车床 CNC lathe
物流行业 Logistics industry
焊接设备 Welding equipment
轨道交通 rail transit

工程机械 construction machinery
电子电气 Electronic and Electrical
医疗行业 Medical industry
食品加工 food processing
农业生产 agricultural production
新零售行业 New retail industry